



Acoustics in Style & Eco-Care

PRODUCT CATALOG 2025

Contents

- 1,2
- 3,4 Behind the Sound
- 5,6 Advanced Sound Absorbing Features
- 7,8 Echo Care at Our Core
- 9,10 Certified Excellence
- 11,12 Stylish & Versatile

Wall Panels

- 13,14
- 15 **Plaid, Ridge, Bold**
- 16 Plaid

- 17 Ridge

- 18 Bold

- 19 **Moon, Saturn, Venus**
- 20 Moon

- 21 Saturn

- 22 Venus

- 23,24 **Zig, Zag**
- 25 Zig

- 26 Zag

- 27,28 **Corner, Central**
- 29 Corner

- 30 Central

- 31,32 Cross



- 33 Hex-One


- 34 Hex-One
- 35 Onyxa

- 36 Onyxa Form
- 37 Onyxa Trio

- 38 Onyxa Duo


- 39,40 **Woody Felt**
- 41,42 Woody Felt Small


- 43,44 **Striped**
- 45,46 Striped Small, Striped Medium
- 47,48 Striped Large


- 49,50 **EchoStripe**
- 51,52 EchoStripe


Drop-In Tiles

- 53,54
- 55,56 Hoop-In





- 57 Cross Drop-In

- 58 CTRL-N

- 59 Nest-In

- 60 Sonicdome


Sound Blades


- 61,62
- 63,64,65,66 Blade Small

- 67,68,69,70 Blade Medium

- 71,72,73,74 Blade Large

- 75,76 Blade X Large


Sound Clouds




- 77,78,79,80
- 81,82 Rotund Small

- 83,84 Rotund Medium

- 85,86 Rotund Large




- 87,88 Coleo Large


Sound Clouds

- 89,90,91,92
- 93,94 Oblong Small

- 95,96 Frame Large

- 97,98 Oblong Large


Dividers on Legs & Casters

- 99,100,101,102
- 103,104 Rotund L - Divider

- 105,106 Coleo L - Divider

- 107,108 Frame L - Divider

- 109,110 Oblong L - Divider


Hanging - Dividers

- 111,112 Bold Large Divider

- 113,114 Bold Large Divider
- 115,116 Color-IT
- 117,118 Metal Colors
- 119,120 Contacts



Behind the Sound

At Acoustera, we blend artistic design, eco-friendly innovation, and acoustic expertise to create beautifully sustainable solutions. We focus on reducing unwanted sounds while making spaces stylish and efficient.

Years of expertise in the design of architectural acoustic products and the development of suitable raw materials culminated in this groundbreaking product, ushering in a new era of acoustic excellence and enabling us to create the "Acoustera" brand in 2024.

By opting for recycled and recyclable raw materials, we renewed our production techniques to minimize waste and ensure the lowest energy consumption, taking on the responsibility of being one of the pioneers in the industry both globally and in Turkey, supported by our experience and design capabilities in this field.

Throughout this process, from raw material production to the final product, carried out in our own factories, we embarked on a new journey with a passion for creating acoustic solutions that not only meet but exceed expectations, while remaining committed to sustainability principles and delivering high acoustic performance and product quality.

We proudly showcase our expanding product range; each item is a testament to our commitment to excellence. With every new development, we aim to add value to the industry and enrich spaces with the perfect harmony of form and function. As we chart the course ahead, we remain steadfast in our mission to redefine the way we experience sound.



Advanced Sound-Absorbing Features

Pluffy-Felt: Puffy & Fluffy

Our proprietary porous felted material boasts enhanced air-permeability, delivering not only superior acoustic performance, but also exceptional thermal insulation properties.



Up to A class
Sound Absorbing
Fluffy fiber technology



Air Permeability
ISO 9237: 1995 -
584.8 l/m²/sec



Does Not Hold
Moisture



Moisture Resistance &
UV Exposure

Suspended Ceilings -
Requirements And Test
Methods. EN 13964 : 2014
- "B" Class PASSED

Plastics Artificial radiation or
weathering in devices - Part 3:
UV fluorescent lamps. EN
4892-3: 2016 - PASSED



Thermal insulation
0,035 W/mK



Eco-Care at Our Core

We prioritize eco-conscious practices in every aspect of our operations, from sourcing raw materials to product disposal.

Our innovative manufacturing techniques reduce waste and energy consumption, while our commitment to sustainability ensures responsible product lifecycle management.

We continuously strive to improve efficiency, reduce energy consumption, target bio-compatibility, and driving towards a greener



100% Recyclable



60% Material from Recycled PET



Fibre Composition
ISO 1833 - 100,0 %
Polyester



Certified Excellence

Our excellence is proven through rigorous testing and certification.

Acoustera products have certifications for maximum safety, including fire resistance, thermal insulation, antibacterial properties, being emission-free, containing no chemicals, and light fastness.



99.9% Antibacterial test (ISO-20743:2013)



Low VOC
SNV 195 651:1968
Emission free Odourless



Non-Toxic No Chemicals
Formaldehyde Free
ISO 14184-1:2011



Flame Resistant
US: ASTM E 84 A Class
EU: B-s1,d0 (EN 13501-1)



Color Fastness To Pool Water; ISO 105 E03:2010
Color Change: 4-5 (Slightly Change - NoChange)



Light fastness 4+ (ISO-105 B02)



Stylish & Versatile

Our products are like "Lego" parts, allowing you to "mix & match" to your heart's content.

With a wide range of colors, patterns, and customizable options, our PET-Felt panels seamlessly integrate into your interior, adding both beauty and functionality.



Compatible
Variety of
Standard Sizes



Easy to Install



Easy to Process



Easy to Clean



Durable




Lightweight



Pinnable



Impact Resistant
Flexible



Wall Panels



Plaid, Ridge & Bold



Holistic Aesthetic Appeal

The simple yet cohesive geometry of the Plaid, Ridge, and Bold models allows for versatile use as focal points or backdrops in architectural solutions.


This coordinated grouping enhances holistic aesthetic appeal, optimizing both visual and user experiences to create silent, functional, and visually appealing spaces.



Plaid Sound-Absorbing Decorative Panel



300mm x 300mm x 13mm

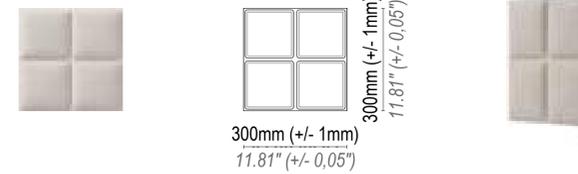

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
PLD-20AAN - Inherent (Panel Only)	48 / 4.32 m ²			
PLD-20PSN - Inherent + Peel & Stick	48 / 4.32 m ²			
PLD-20AAC - Color-IT (Panel Only)	48 / 4.32 m ²			
PLD-20PSC - Color-IT + Peel & Stick	48 / 4.32 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 112.5 gr. +/- 10% tolerance
1 tile: 0.25 lbs with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")
Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm
W: 24.5" D: 26" H: 7.5"

1 Box: 48 x panels

1 Box: 4.32 m²

1 Box: 46.50 ft²

1 Color of choice per package


Gross weight: 6.8 kg

Gross weight: 15 lbs

PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"

30 Pcs. Box
Gross Weight
227 kg
501 lbs




W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"

24 Pcs. Box
Gross Weight
182 kg
401 lbs



ACOUSTIC PERFORMANCE

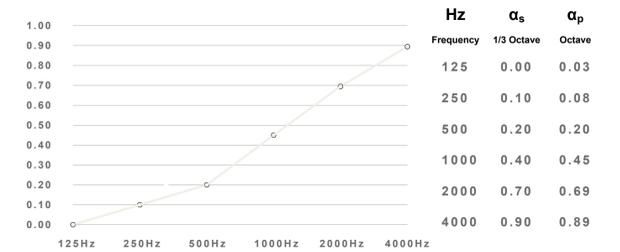


	α_w	NRC	SAA	Class
Plaid	0.25	0.40	0.36	E

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Ridge Sound-Absorbing Decorative Panel

300mm x 600mm x 13mm

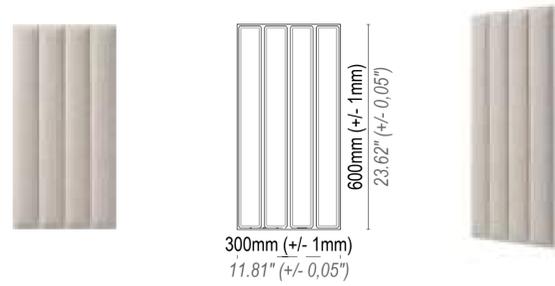

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
RDG-20AAN - Inherent (Panel Only)	24 / 4.32 m ²			
RDG-20PSN - Inherent + Peel & Stick	24 / 4.32 m ²			
RDG-20AAC - Color-IT (Panel Only)	24 / 4.32 m ²			
RDG-20PSC - Color-IT + Peel & Stick	24 / 4.32 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.

100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 225 gr. +/- 10% tolerance

1 tile: 0.50 lbs with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/- 0.08")

Min. 3 mm (+/- 2 mm) - 0.12" (+/- 0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm

W: 24.5" D: 26" H: 7.5"

1 Box: 24 x panels

1 Box: 4.32 m²

1 Box: 46.50 ft²

1 Color of choice per package

Gross weight: 6.8 kg

Gross weight: 15 lbs



PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"

30 Pcs. Box
Gross Weight
227 kg
501 lbs

W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"

24 Pcs. Box
Gross Weight
182 kg
401 lbs

ACOUSTIC PERFORMANCE

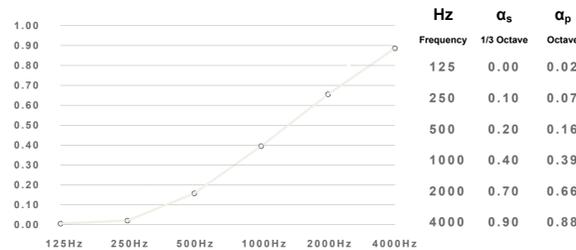


	α_w	NRC	SAA	Class
According to ISO 11654 According to ASTM C423 Sound Absorption Average Sound Absorption				
Ridge	0.25	0.30	0.32	E

α_s Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654



Bold Sound-Absorbing Decorative Panel

600mm x 600mm x 13mm

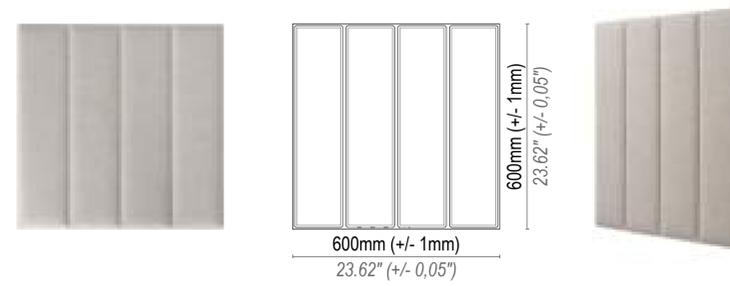

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
BLD-20AAN - Inherent (Panel Only)	12 / 4.32 m ²			
BLD-20PSN - Inherent + Peel & Stick	12 / 4.32 m ²			
BLD-20AAC - Color-IT (Panel Only)	12 / 4.32 m ²			
BLD-20PSC - Color-IT + Peel & Stick	12 / 4.32 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.

100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 450 gr. +/- 10% tolerance

1 tile: 1 lb with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/- 0.08")

Min. 3 mm (+/- 2 mm) - 0.12" (+/- 0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm

W: 24.5" D: 26" H: 7.5"

1 Box: 12 x panels

1 Box: 4.32 m²

1 Box: 46.50 ft²

1 Color of choice per package

Gross weight: 6.8 kg

Gross weight: 15 lbs



PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"

30 Pcs. Box
Gross Weight
227 kg
501 lbs

W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"

24 Pcs. Box
Gross Weight
182 kg
401 lbs

ACOUSTIC PERFORMANCE

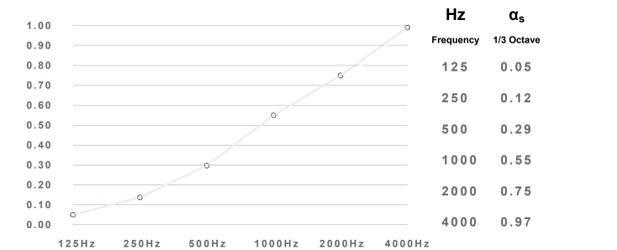

	α_w	NRC	SAA	Class
According to ISO 11654 According to ASTM C423 Sound Absorption Average Sound Absorption				
Bold	0.35	0.45	0.46	D

α_s Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Moon, Saturn & Venus



Celestial Harmonious Design

Inspired by celestial bodies, our circular-designed product group-featuring the 'Moon, Saturn, and Venus' models-enhances acoustic balance in spaces.


These models, drawing from the natural geometries of planets, work harmoniously to optimize acoustics.

Incorporating these design-focused pieces balances visual and auditory elements, creating an immersive and harmonious environment.



Moon Sound-Absorbing Decorative Panel

300mm x 300mm x 13mm

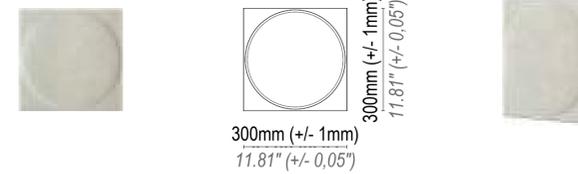

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
MON-20AAN - Inherent (Panel Only)	48 / 4.32 m ²			
MON-20PSN - Inherent + Peel & Stick	48 / 4.32 m ²			
MON-20AAC - Color-IT (Panel Only)	48 / 4.32 m ²			
MON-20PSC - Color-IT + Peel & Stick	48 / 4.32 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 112.5 gr. +/- 10% tolerance
1 tile: 0.25 lbs with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")
Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm
W: 24.5" D: 26" H: 7.5"

1 Box: 48 x panels

1 Box: 4.32 m²

1 Box: 46.50 ft²

1 Color of choice per package


Gross weight: 6.8 kg

Gross weight: 15 lbs

PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"

30 Pcs. Box
Gross Weight
227 kg
501 lbs




W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"

24 Pcs. Box
Gross Weight
182 kg
401 lbs



ACOUSTIC PERFORMANCE

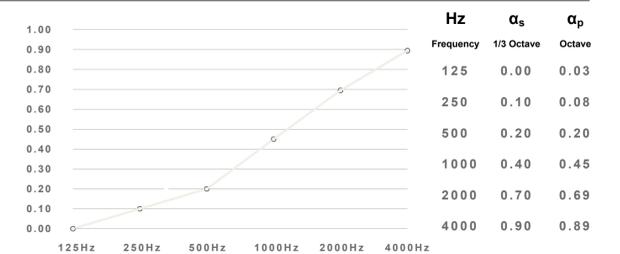


Reference Product: Plaid	α_w	NRC	SAA	Class
Moon	0.25	0.40	0.36	E

α_s Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Saturn Sound-Absorbing Decorative Panel

600mm x 600mm x 13mm

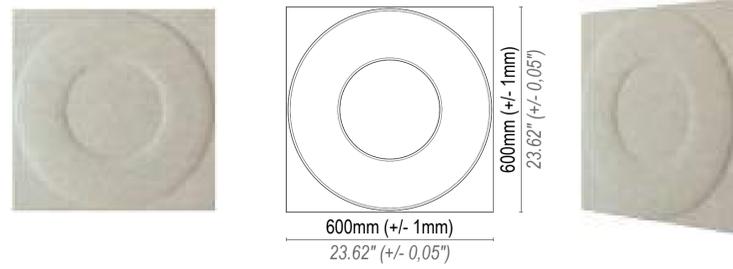

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
STN-20AAN - Inherent (Panel Only)	12 / 4.32 m ²			
STN-20PSN - Inherent + Peel & Stick	12 / 4.32 m ²			
STN-20AAC - Color-IT (Panel Only)	12 / 4.32 m ²			
STN-20PSC - Color-IT + Peel & Stick	12 / 4.32 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.

100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 450 gr. +/- 10% tolerance

1 tile: 1 lb with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")

Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm

W: 24.5" D: 26" H: 7.5"

1 Box: 12 x panels

1 Box: 4.32 m²

1 Box: 46.50 ft²

1 Color of choice per package

Gross weight: 6.8 kg

Gross weight: 15 lbs



PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"

30 Pcs. Box
Gross Weight
227 kg
501 lbs

W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"

24 Pcs. Box
Gross Weight
182 kg
401 lbs

ACOUSTIC PERFORMANCE

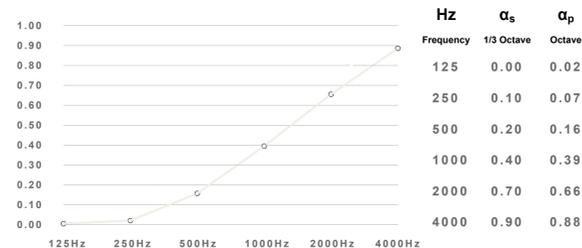


	α_w	NRC	SAA	Class
Reference Product: Ridge	According to ISO 11654	According to ASTM C423	Sound Absorption Average	Sound Absorption
Saturn	0.25	0.30	0.32	E

α_s Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Venus Sound-Absorbing Decorative Panel

600mm x 600mm x 13mm

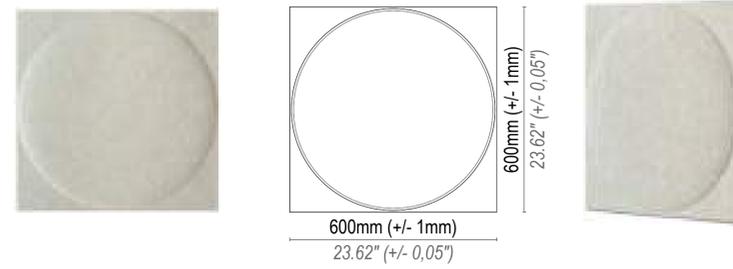

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
VNS-20AAN - Inherent (Panel Only)	12 / 4.32 m ²			
VNS-20PSN - Inherent + Peel & Stick	12 / 4.32 m ²			
VNS-20AAC - Color-IT (Panel Only)	12 / 4.32 m ²			
VNS-20PSC - Color-IT + Peel & Stick	12 / 4.32 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.

100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 450 gr. +/- 10% tolerance

1 tile: 1 lb with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")

Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm

W: 24.5" D: 26" H: 7.5"

1 Box: 12 x panels

1 Box: 4.32 m²

1 Box: 46.50 ft²

1 Color of choice per package

Gross weight: 6.8 kg

Gross weight: 15 lbs



PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"

30 Pcs. Box
Gross Weight
227 kg
501 lbs

W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"

24 Pcs. Box
Gross Weight
182 kg
401 lbs

ACOUSTIC PERFORMANCE

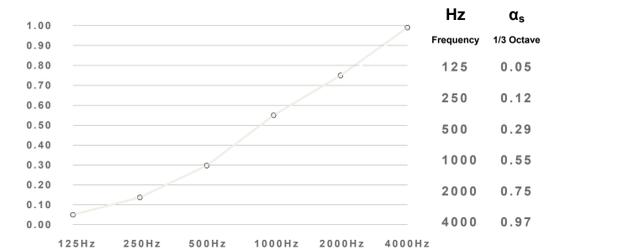

	α_w	NRC	SAA	Class
Reference Product: Bold	According to ISO 11654	According to ASTM C423	Sound Absorption Average	Sound Absorption
Venus	0.35	0.45	0.46	D

α_s Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Zig & Zag



Movement & Acoustic Comfort


The 'Zig' and 'Zag' models move in contrasting directions yet integrate seamlessly with the 'Bold' model, creating a perfect combination within the Acoust-It range.

This coordinated collection provides aesthetic appeal and acoustic comfort for interiors."



Zig Sound-Absorbing Decorative Panel

600mm x 600mm x 13mm

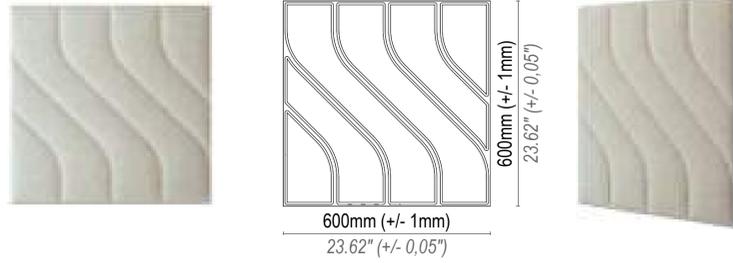

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
ZIG-20AAN - Inherent (Panel Only)	12 / 4.32 m ²			
ZIG-20PSN - Inherent + Peel & Stick	12 / 4.32 m ²			
ZIG-20AAC - Color-IT (Panel Only)	12 / 4.32 m ²			
ZIG-20PSC - Color-IT + Peel & Stick	12 / 4.32 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.

100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 450 gr. +/- 10% tolerance

1 tile: 1 lb with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")

Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm

W: 24.5" D: 26" H: 7.5"

1 Box: 12 x panels

1 Box: 4.32 m²

1 Box: 46.50 ft²

1 Color of choice per package


Gross weight: 6.8 kg

Gross weight: 15 lbs




PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"




30 Pcs. Box
Gross Weight
227 kg
501 lbs

W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"




24 Pcs. Box
Gross Weight
182 kg
401 lbs

ACOUSTIC PERFORMANCE

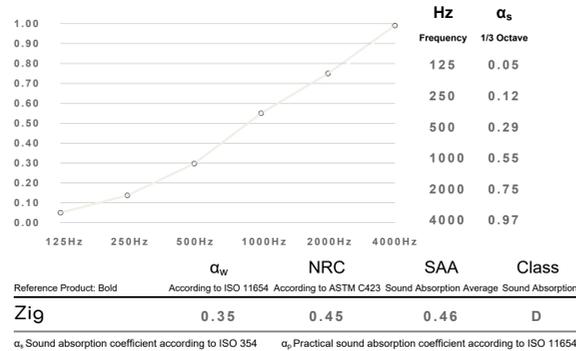

Zag Sound-Absorbing Decorative Panel

600mm x 600mm x 13mm

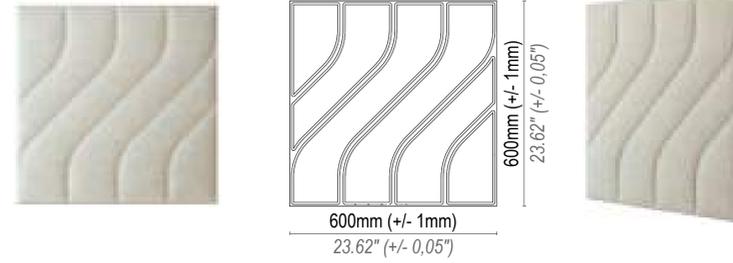

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
ZAG-20AAN - Inherent (Panel Only)	12 / 4.32 m ²			
ZAG-20PSN - Inherent + Peel & Stick	12 / 4.32 m ²			
ZAG-20AAC - Color-IT (Panel Only)	12 / 4.32 m ²			
ZAG-20PSC - Color-IT + Peel & Stick	12 / 4.32 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.

100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 450 gr. +/- 10% tolerance

1 tile: 1 lb with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")

Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm

W: 24.5" D: 26" H: 7.5"

1 Box: 12 x panels

1 Box: 4.32 m²

1 Box: 46.50 ft²

1 Color of choice per package


Gross weight: 6.8 kg

Gross weight: 15 lbs




PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"




30 Pcs. Box
Gross Weight
227 kg
501 lbs

W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"



24 Pcs. Box
Gross Weight
182 kg
401 lbs

ACOUSTIC PERFORMANCE

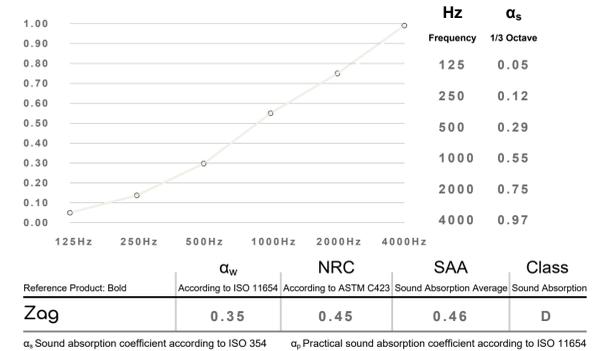

Corner & Central



We've maintained harmony and continuity, creating intertwining waves that blend seamlessly with other products in our series.

Intertwining Waves, Crafting Silence

This integration allows for the recreation of silent spaces, offering endless customizable options to suit your preferences.



Cross



Dynamism and Simplicity

'Cross' features a versatile diagonal line pattern that enables creative installations through simple 90-degree rotations, allowing you to refresh aesthetics without additional patterns.


This functionality not only enhances visual appeal but also offers limitless customization while ensuring consistent acoustic performance.



Cross Sound-Absorbing Decorative Panel



600mm x 600mm x 13mm

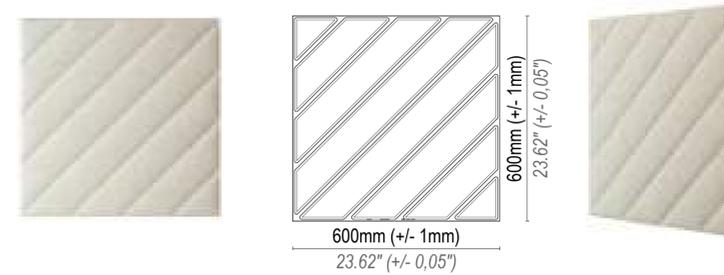

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
CRS-20AAN - Inherent (Panel Only)	12 / 4.32 m ²			
CRS-20PSN - Inherent + Peel & Stick	12 / 4.32 m ²			
CRS-20AAC - Color-IT (Panel Only)	12 / 4.32 m ²			
CRS-20PSC - Color-IT + Peel & Stick	12 / 4.32 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 450 gr. +/- 10% tolerance

1 tile: 1 lb with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")
Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm

W: 24.5" D: 26" H: 7.5"

1 Box: 12 x panels

1 Box: 4.32 m²

1 Box: 46.50 ft²

1 Color of choice per package

Gross weight: 6.8 kg


Gross weight: 15 lbs



PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"

30 Pcs. Box
Gross Weight
227 kg
501 lbs




W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"

24 Pcs. Box
Gross Weight
182 kg
401 lbs



ACOUSTIC PERFORMANCE

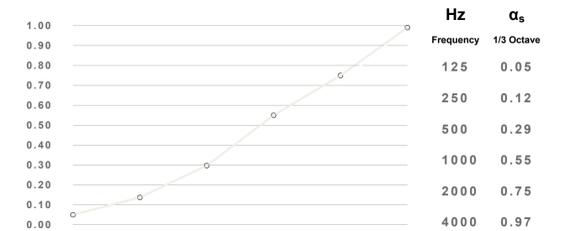


Reference Product: Bold	α _w	NRC	SAA	Class
Cross	0.35	0.45	0.46	D

α_w Sound absorption coefficient according to ISO 354 α_s Practical sound absorption coefficient according to ISO 11654



520mm x 600mm x 13mm

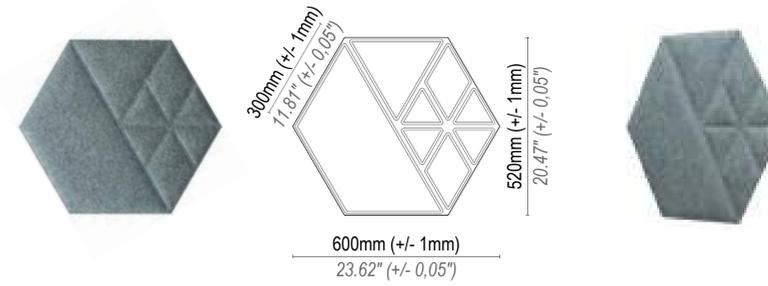

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
OXF-30AAN - Inherent (Panel Only)	12 / 3.74 m ²			
OXF-30PSN - Inherent + Peel & Stick	12 / 3.74 m ²			
OXF-30AAC - Color-IT (Panel Only)	12 / 3.74 m ²			
OXF-30PSC - Color-IT + Peel & Stick	12 / 3.74 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 400 gr. +/- 10% tolerance

1 tile: 0.88 lbs with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")
Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm

W: 24.5" D: 26" H: 7.5"

1 Box: 12 x panels

1 Box: 3.744 m²

1 Box: 40.30 ft²

1 Color of choice per package


Gross weight: 6.0 kg

Gross weight: 13.22 lbs

PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"

30 Pcs. Box
Gross Weight
210 kg
463 lbs




W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"

24 Pcs. Box
Gross Weight
165 kg
364 lbs



ACOUSTIC PERFORMANCE

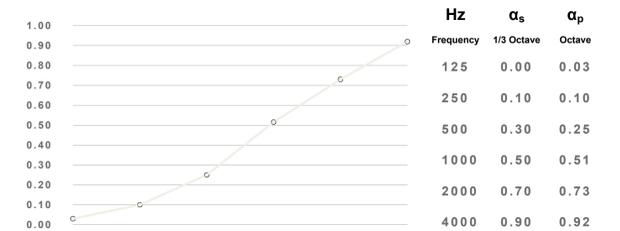


	α_w	NRC	SAA	Class
Onyxa Form	0.30	0.40	0.40	D

α_w , Sound absorption coefficient according to ISO 11654 α_p , Practical sound absorption coefficient according to ISO 11654

Onyx Trio Sound-Absorbing Decorative Panel

520mm x 600mm x 13mm

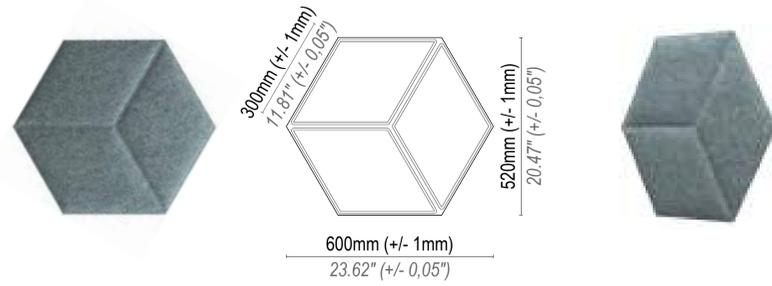

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
OXT-30AAN - Inherent (Panel Only)	12 / 3.74 m ²			
OXT-30PSN - Inherent + Peel & Stick	12 / 3.74 m ²			
OXT-30AAC - Color-IT (Panel Only)	12 / 3.74 m ²			
OXT-30PSC - Color-IT + Peel & Stick	12 / 3.74 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.

100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 400 gr. +/- 10% tolerance

1 tile: 0.88 lbs with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")

Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm

W: 24.5" D: 26" H: 7.5"

1 Box: 12 x panels

1 Box: 3.744 m²

1 Box: 40.30 ft²

1 Color of choice per package

Gross weight: 6.0 kg

Gross weight: 13.22 lbs



PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"


30 Pcs. Box
Gross Weight
210 kg
463 lbs

W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"

24 Pcs. Box
Gross Weight
165 kg
364 lbs



ACOUSTIC PERFORMANCE

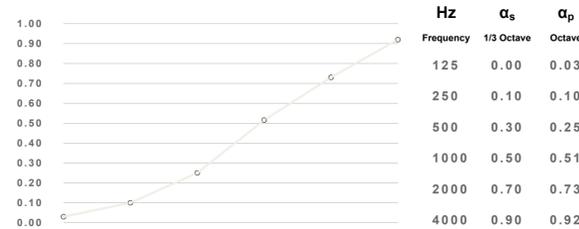


	α_w	NRC	SAA	Class
Onyx Trio	0.30	0.40	0.40	D

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Onyx Duo Sound-Absorbing Decorative Panel

520mm x 600mm x 13mm

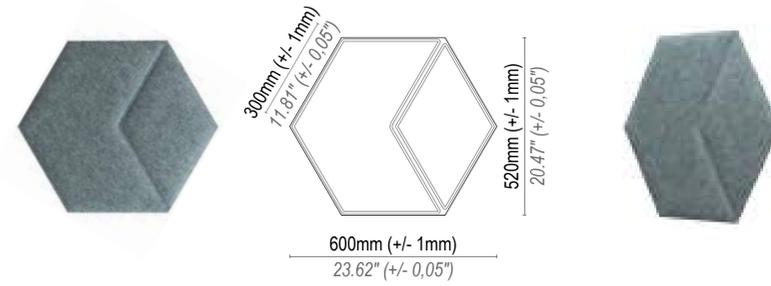

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
OXD-30AAN - Inherent (Panel Only)	12 / 3.74 m ²			
OXD-30PSN - Inherent + Peel & Stick	12 / 3.74 m ²			
OXD-30AAC - Color-IT (Panel Only)	12 / 3.74 m ²			
OXD-30PSC - Color-IT + Peel & Stick	12 / 3.74 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.

100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 400 gr. +/- 10% tolerance

1 tile: 0.88 lbs with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")

Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 660 mm H: 190 mm

W: 24.5" D: 26" H: 7.5"

1 Box: 12 x panels

1 Box: 3.744 m²

1 Box: 40.30 ft²

1 Color of choice per package


Gross weight: 6.0 kg

Gross weight: 13.22 lbs

PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"

30 Pcs. Box
Gross Weight
210 kg
463 lbs




W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"

24 Pcs. Box
Gross Weight
165 kg
364 lbs



ACOUSTIC PERFORMANCE

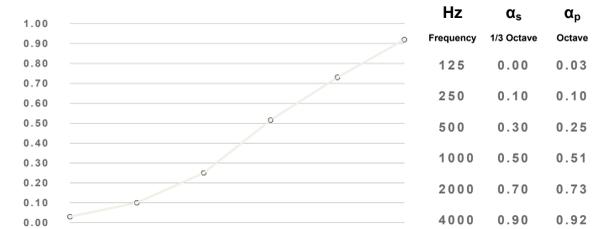

	α_w	NRC	SAA	Class
Onyx Duo	0.30	0.40	0.40	D

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Woody Felt



Our innovative 'Woody-Felt' uses eco-friendly printing on recycled PET felt to mimic wood without cutting trees.

Transforming PET into Wood-Like Elegance

This sustainable approach extends wood-like aesthetics to curved edges, achieving a seamless and environmentally responsible design.



Woody Felt - Small

Sound-Absorbing Decorative Panel



150mm x 1200mm x 13mm



Product Code / Description	Box Qty / m ²	Color-IT	Peel & Stick (Optional)
WFS-20AAN - Inherent (Panel Only)	24 / 4.32 m ²		
WFS-20PSN - Inherent + Peel & Stick	24 / 4.32 m ²		
WFS-20AAC - Color-IT (Panel Only)	24 / 4.32 m ²		
WFS-20PSC - Color-IT + Peel & Stick	24 / 4.32 m ²		



APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 250 gr. +/- 10% tolerance

1 tile: 0.55 lbs with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")

Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")

BOX SIZE & CONTENT

W: 620 mm D: 1220 mm H: 120 mm

W: 24.5" D: 48" H: 4.73"

1 Box: 24 x panels

1 Box: 4.32 m²

1 Box: 46.50 ft²

1 Color of choice per package

Gross weight: 7.5 kg

Gross weight: 16.5 lbs

PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 2150 mm


W: 48" D: 40" H: 84.5"

24 Pcs. Box

Gross Weight

180 kg

396 lbs



W: 1200 mm D: 800 mm H: 2150 mm


W: 47.25" D: 31.5" H: 84.5"

18 Pcs. Box


Gross Weight

135 kg

298 lbs



ACOUSTIC PERFORMANCE

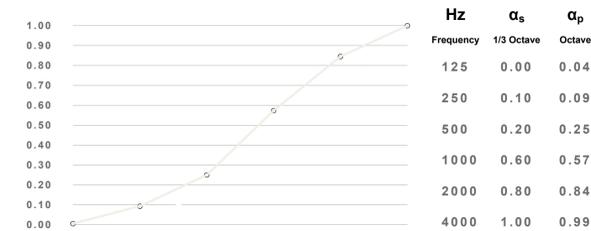

Reference Product: Striped Large	α_{10}	NRC	SAA	Class
According to ISO 11654	0.30	0.50	0.44	D

According to ASTM C423 Sound Absorption Average Sound Absorption

Woody Felt - S

α_s Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654



Striped



With our large-sized panels, you can create floor-to-ceiling acoustic solutions using single-piece products.


Placing them side by side, vertically or horizontally, allows you to form symmetric or asymmetric patterns with their complementary dimensions & designs.

Acoustic Art from Floor to Ceiling



Striped Small Sound-Absorbing Decorative Panel

600mm x 600mm x 13mm

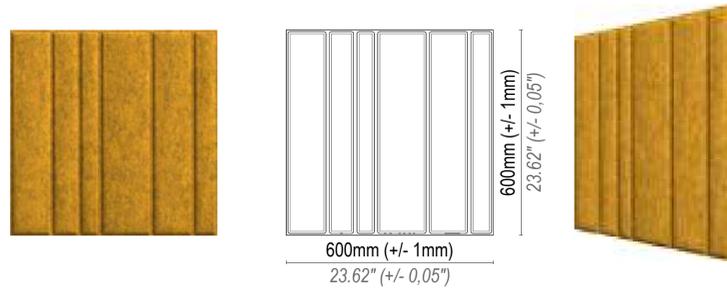

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
STS-40AAN - Inherent (Panel Only)	12 / 4.32 m ²			
STS-40PSN - Inherent + Peel & Stick	12 / 4.32 m ²			
STS-40AAC - Color-IT (Panel Only)	12 / 4.32 m ²			
STS-40PSC - Color-IT + Peel & Stick	12 / 4.32 m ²			

APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK

WEIGHT
1 tile: 500 gr. +/- 10% tolerance
1 tile: 1 lb with +/- 10% tolerance

THICKNESS

 Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")
 Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")


BOX SIZE & CONTENT
W: 620 mm D: 660 mm H: 190 mm
W: 24.5" D: 26" H: 7.5"

1 Box: 12 x panels
1 Box: 4.32 m²
1 Box: 46.50 ft²
1 Color of choice per package
Gross weight: 7.5 kg
Gross weight: 16.5 lbs




PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"
30 Pcs. Box
Gross Weight
227 kg
501 lbs



W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"
24 Pcs. Box
Gross Weight
182 kg
401 lbs




ACOUSTIC PERFORMANCE

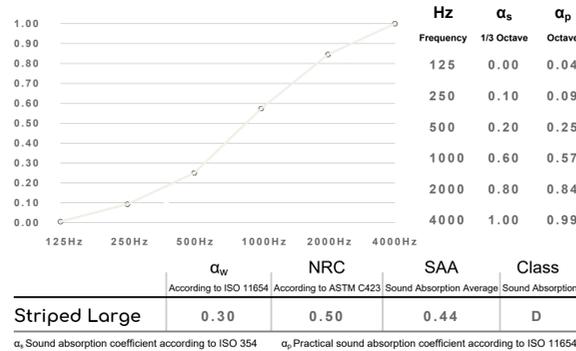

Striped Medium Sound-Absorbing Decorative Panel

600mm x 1200mm x 13mm

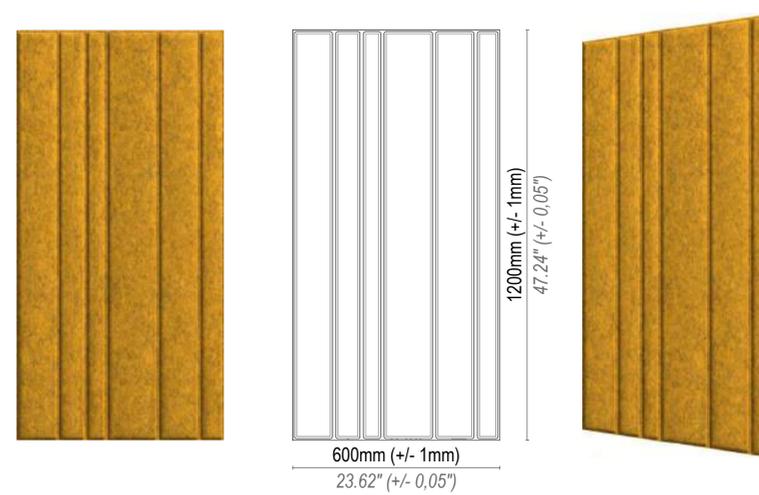

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Peel & Stick (Optional)
STM-40AAN - Inherent (Panel Only)	12 / 4.32 m ²			
STM-40PSN - Inherent + Peel & Stick	12 / 4.32 m ²			
STM-40AAC - Color-IT (Panel Only)	12 / 4.32 m ²			
STM-40PSC - Color-IT + Peel & Stick	12 / 4.32 m ²			

APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET
up to 60% Recycled content & Recyclable



Smooth Surface - Impact Resistance - Flexible

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK

WEIGHT
1 tile: 1000 gr. +/- 10% tolerance
1 tile: 2 lb with +/- 10% tolerance

THICKNESS

 Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")
 Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")


BOX SIZE & CONTENT
W: 1220 mm D: 1220 mm H: 120 mm
W: 48" D: 48" H: 4.72"

1 Box: 12 x panels
1 Box: 8.64 m²
1 Box: 93.00 ft²
1 Color of choice per package
Gross weight: 13.6 kg
Gross weight: 30 lbs




PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 1400 mm
W: 48" D: 40" H: 55"
8 Pcs. Box
Gross Weight
100 kg
220 lbs



W: 1200 mm D: 800 mm H: 1400 mm
W: 47.25" D: 31.5" H: 55"
7 Pcs. Box
Gross Weight
86 kg
190 lbs




ACOUSTIC PERFORMANCE

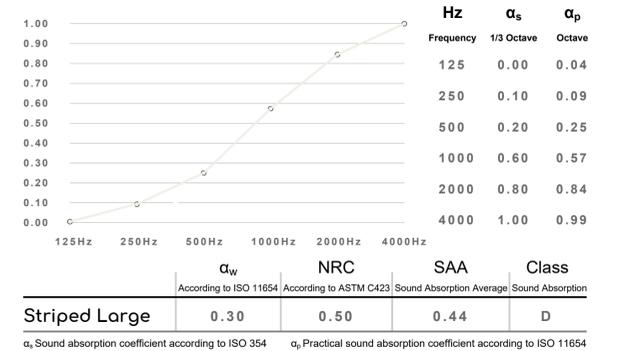

Striped Large Sound-Absorbing Decorative Panel

600mm x 2400mm x 13mm

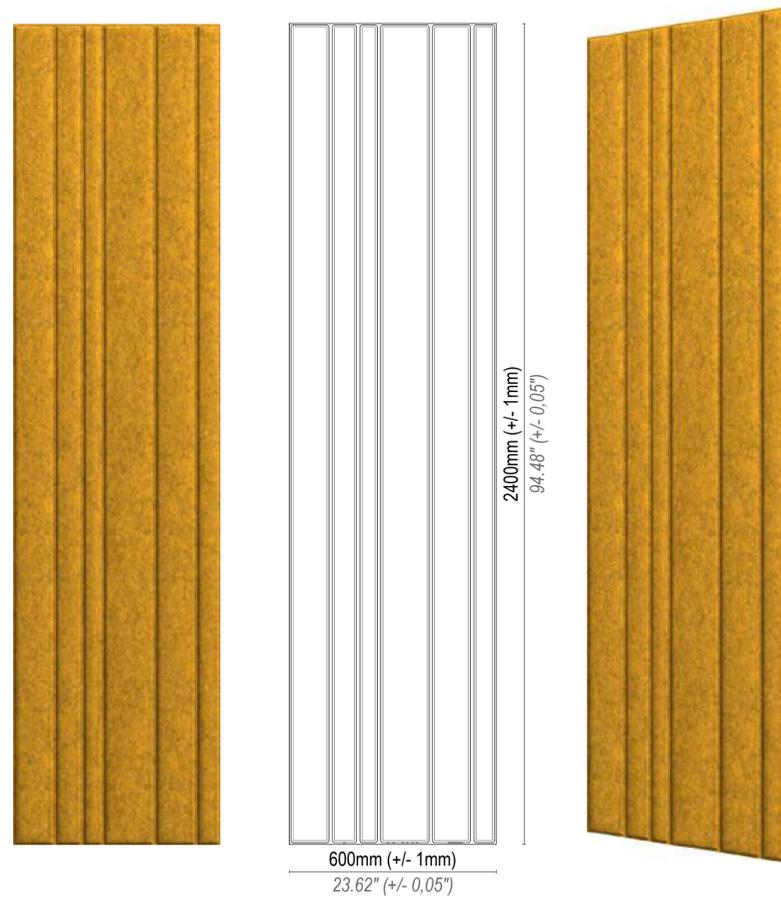

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Color-IT
STL-40AAN - Inherent (Panel Only)	6 / 8.64 m ²			
STL-40AAC - Color-IT (Panel Only)	6 / 8.64 m ²			



APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable



FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK


WEIGHT
1 tile: 2000 gr. +/- 10% tolerance
1 tile: 4.40 lbs with +/- 10% tolerance

THICKNESS

Max. 13 mm (+/- 2 mm) - 0.51" (+/-0.08")
Min. 3 mm (+/- 2 mm) - 0.12" (+/-0.08")


BOX SIZE & CONTENT
W: 620 mm D: 2420 mm H: 120 mm
W: 24.5" D: 65.3" H: 4.73"
1 Box: 6 x panels
1 Box: 8.64 m²
1 Box: 93 ft²
1 Color of choice per package
Gross weight: 14.5 kg
Gross weight: 32 lbs

PALETTE SIZE & CONTENT

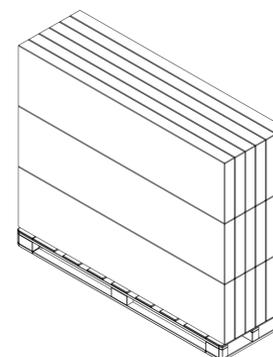

W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"
18 Pcs. Box
Gross Weight
261 kg
575 lbs

ACOUSTIC PERFORMANCE

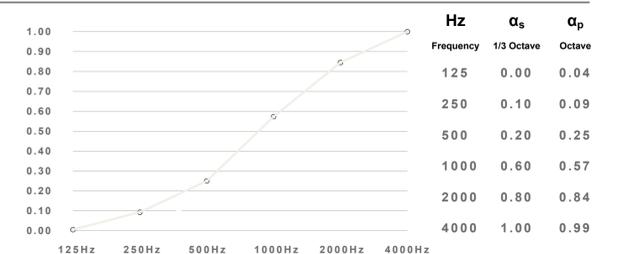

	α_w	NRC	SAA	Class
Striped Large	0.30	0.50	0.44	D

According to ISO 11654 | According to ASTM C423 | Sound Absorption Average | Sound Absorption

α_s Sound absorption coefficient according to ISO 354 | α_p Practical sound absorption coefficient according to ISO 11654



EchoStripe



With our large-sized panels, you can create floor-to-ceiling acoustic solutions using single-piece products.

Acoustic Art from Floor to Ceiling






Drop-In Tiles








EXISTING CARRIER T15 or T24

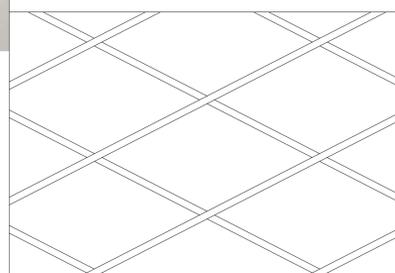

INSERTING DROP-IN TILE

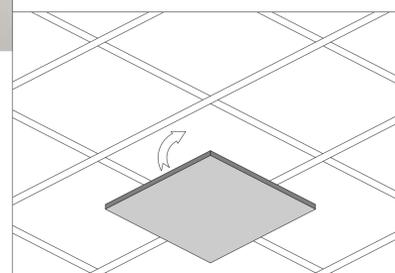

FINALIZATION

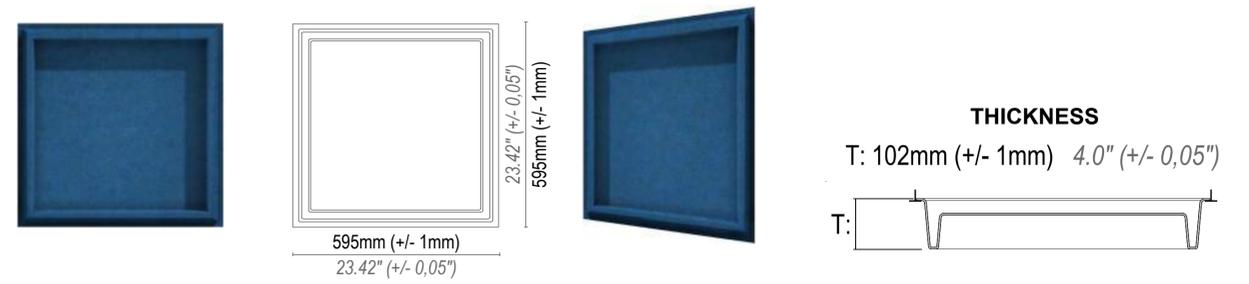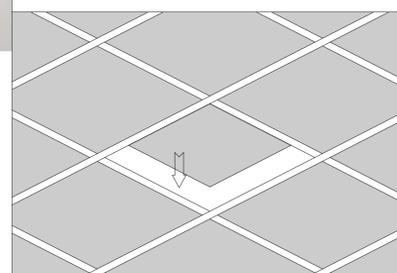

Product Code / Description	Box Qty / m ²	Inherent	Color-IT
HPN-20DRN - Inherent (Panel Only)	12 / 4.248 m ²		
HPN-20DRC - Color-IT (Panel Only)	12 / 4.248 m ²		

APPLICATION
3D molded ceiling panel
Suitable for "T15" & "T24",
suspended ceiling carrier systems
Only panels are included


MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)



THERMAL INSULATION
0,035 W/mK

WEIGHT
1 tile: 600 gr. +/- 10% tolerance
1 tile: 1.32 lbs with +/- 10% tolerance


BOX SIZE & CONTENT
W: 620 mm D: 660 mm H: 190 mm
W: 24.5" D: 26" H: 7.5"
1 Box: 6 x panels
1 Box: 2.124 m²
1 Box: 22.86 ft²
1 Color of choice per package
Gross weight: 5 kg
Gross weight: 11 lbs

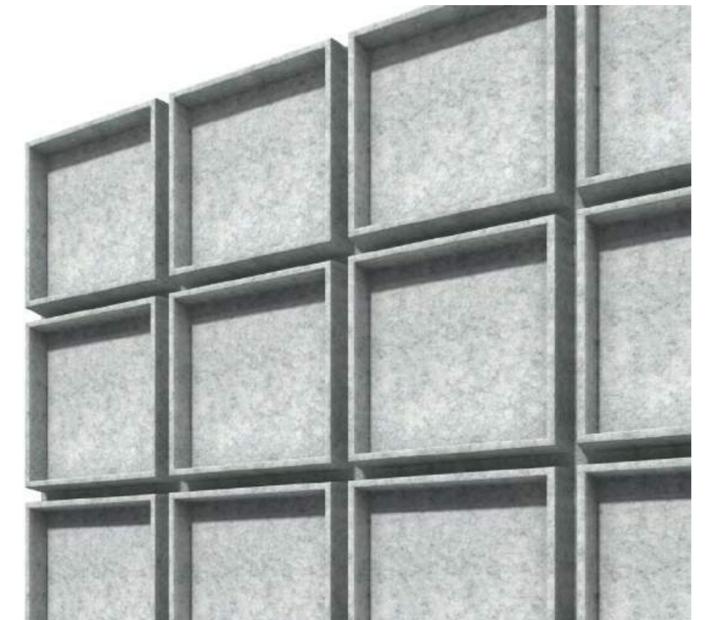


PALETTE SIZE & CONTENT




ACOUSTIC PERFORMANCE

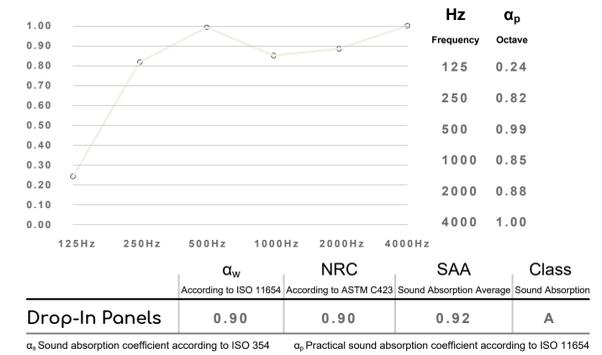



Sound Blades

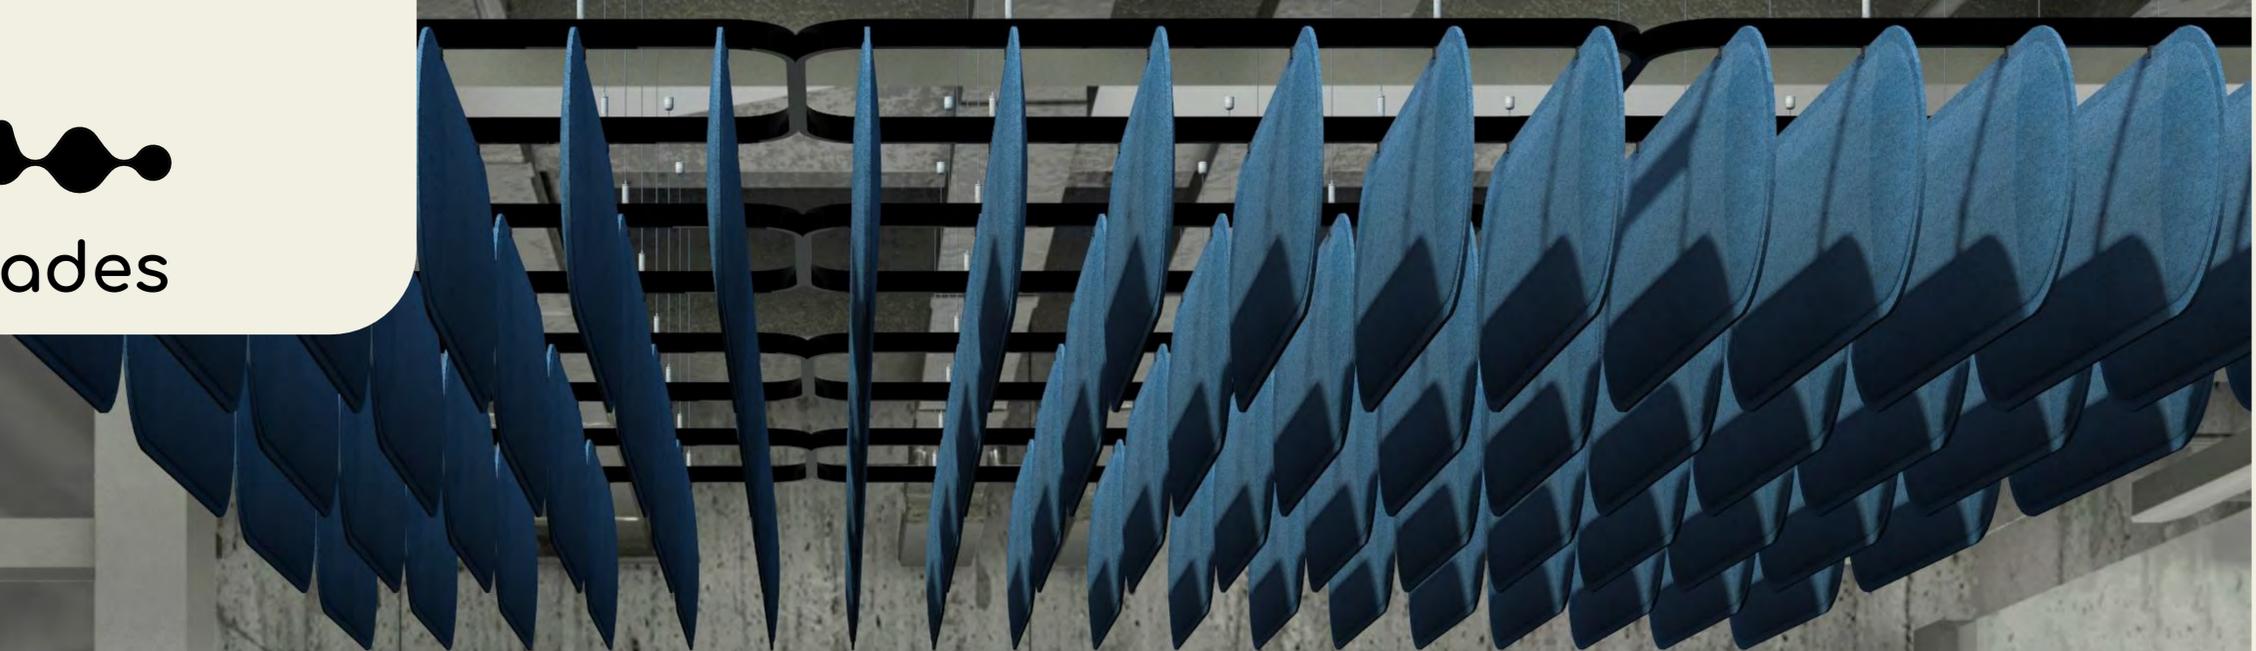

 **ACOUST-IT**
Acoustics in Style & Eco-Care



Sound Blades



Cutting Through Noise

'Blade' sound baffles are designed to provide superior acoustic management by effectively reducing noise and reverberation in large, open spaces.

Suspended vertically from the ceiling, these baffles are perfect for use in areas such as offices, auditoriums, and conference rooms.

With easy installation and customizable options, Blade sound baffles offer a practical and stylish solution for creating quieter, more comfortable spaces.




Blade Small

300mm x 900mm x 20mm




APPLICATION


Wall with hook & loop 4x per unit



Ceiling with hanging wires 2x per unit

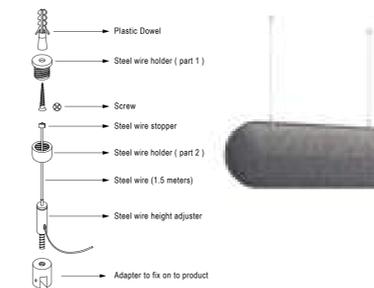

Module with metal carrier & hanging wires



MATERIAL

Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable
Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 565 gr. +/- 10% tolerance
1 tile: 1.24 lbs with +/- 10% tolerance

THICKNESS



Max. 20mm (+/- 2mm) - 0.78" (+/- 0.08")
Min. 5mm (+/- 2mm) - 0.19" (+/- 0.08")

BOX SIZE & CONTENT

W: 920 mm D: 920 mm H: 120 mm
W: 36.22" D: 36.22" H: 4.72"

1 Box: 12 x panels

1 Box: 3.012 m²

1 Box: 34.421 ft²

1 Color of choice per package

Gross weight: 8.0 kg



Gross weight: 17.63 lbs

PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"

20 Pcs. Box
Gross Weight
180 kg
396 lbs

12 Pcs. Box
Gross Weight
115 kg
254 lbs



ACOUSTIC PERFORMANCE

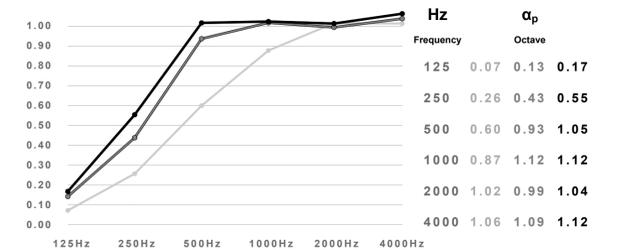

	α_w	NRC	SAA	Class
Blade Small	According to ISO 11654	According to ASTM C423	Sound Absorption Average	Sound Absorption
On the surface	0.55	0.70	0.69	D
Distance to surface: 50mm	0.70	0.90	0.88	C
Distance to surface: 100mm	0.85	1.00	0.94	B


α_p Practical sound absorption coefficient according to ISO 11654
www.acoustera.com

Blade Small Sound-Absorbing Decorative Ceiling Pendant & Wall Panel

300mm x 900mm x 20mm




WALL

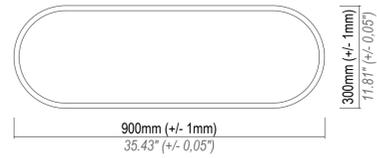

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Hook & Loop (Optional)
BSW-30AAN - Inherent (Panel Only)	12 / 3.01 m ²			
BSW-30HLN - Inherent + Hook & Loop	12 / 3.01 m ²			
BSW-30AAC - Color-IT (Panel Only)	12 / 3.01 m ²			
BSW-30HLC - Color-IT + Hook & Loop	12 / 3.01 m ²			

CEILING

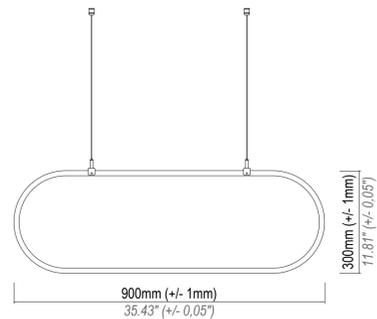



Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Hanging Set
BSH-30HSN - Inherent + Hanging Set	12 / 3.01 m ²			
BSH-30HSC - Color-IT + Hanging Set	12 / 3.01 m ²			

Blade Small Sound-Absorbing Decorative Ceiling Module



CEILING MODULE

- 1 Set:**
 12 X Blade Small
 8 X Hanging Set
 2 X Metal Carrier (450mm x 900mm)
 4 X Metal Carrier Connector
 24 X Metal Adapter

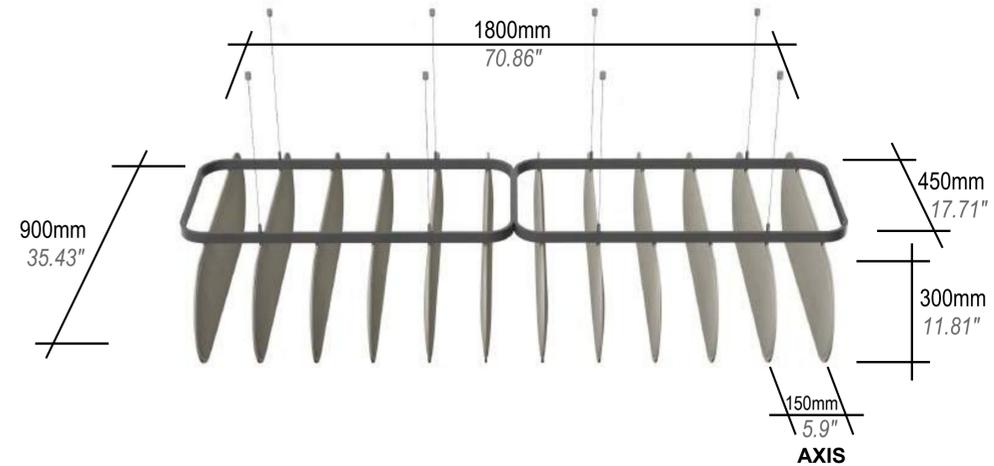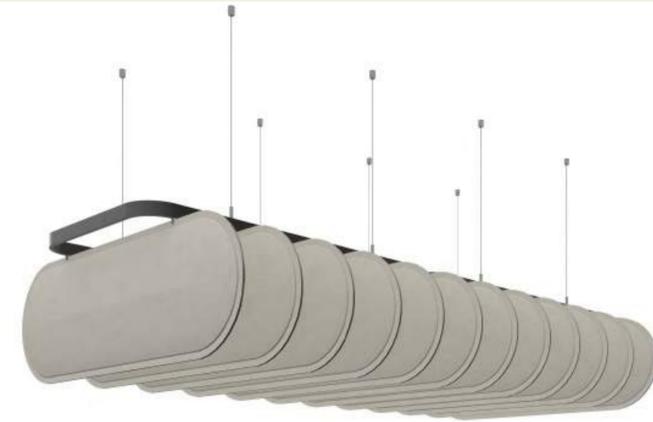

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Carrier System & Hangers
BSM-30CSN - Inherent + Carrier Set	1 Set / 1.62 m ²			
BSM-30CSC - Color-IT + Carrier Set	1 Set / 1.62 m ²			

Blade Medium



Cutting Through Noise

'Blade' sound baffles are designed to provide superior acoustic management by effectively reducing noise and reverberation in large, open spaces.

Suspended vertically from the ceiling, these baffles are perfect for use in areas such as offices, auditoriums, and conference rooms.

With easy installation and customizable options, Blade sound baffles offer a practical and stylish solution for creating quieter, more comfortable spaces.



Blade Medium




1200mm x 300mm x 20mm

APPLICATION


Wall with hook & loop 4x per unit



Ceiling with hanging wires 2x per unit

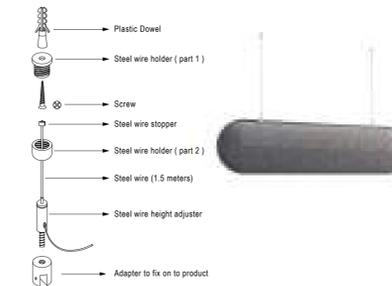

Module with metal carrier & hanging wires

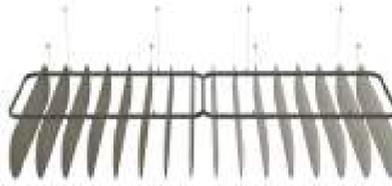

MATERIAL

Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable
Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 765 gr. +/- 10% tolerance
1 tile: 1.68 lbs with +/- 10% tolerance

THICKNESS



Max. 20mm (+/- 2mm) - 0.78" (+/-0.08")
Min. 5mm (+/- 2mm) - 0.19" (+/-0.08")

BOX SIZE & CONTENT

W: 1220 mm D: 1220 mm H: 120 mm
W: 48.03" D: 48.03" H: 4.72"

1 Box: 16 x panels

1 Box: 5.45 m²

1 Box: 58.66 ft²

1 Color of choice per package

Gross weight: 15 kg

Gross weight: 33.07 lbs

PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 1400 mm
W: 48" D: 40" H: 55"

8 Pcs. Box

Gross Weight

140 kg

308 lbs




W: 1200 mm D: 800 mm H: 1400 mm
W: 47.25" D: 31.5" H: 55"

7 Pcs. Box


Gross Weight

120 kg

264 lbs



ACOUSTIC PERFORMANCE

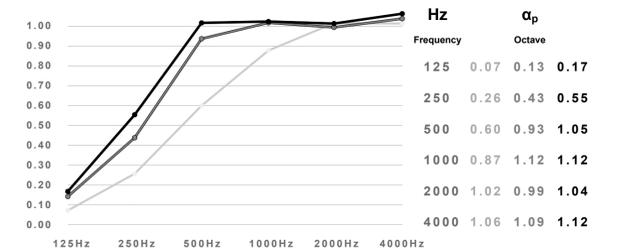

	α_w	NRC	SAA	Class
Blade Medium	According to ISO 11654	According to ASTM C423	Sound Absorption Average	Sound Absorption
On the surface	0.55	0.70	0.69	D
Distance to surface: 50mm	0.70	0.90	0.88	C
Distance to surface: 100mm	0.85	1.00	0.94	B

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Blade Large



Cutting Through Noise

'Blade' sound baffles are designed to provide superior acoustic management by effectively reducing noise and reverberation in large, open spaces.

Suspended vertically from the ceiling, these baffles are perfect for use in areas such as offices, auditoriums, and conference rooms.

With easy installation and customizable options, Blade sound baffles offer a practical and stylish solution for creating quieter, more comfortable spaces.




Blade Large




1200mm x 400mm x 20mm

APPLICATION


Wall with hook & loop 4x per unit



Ceiling with hanging wires 2x per unit

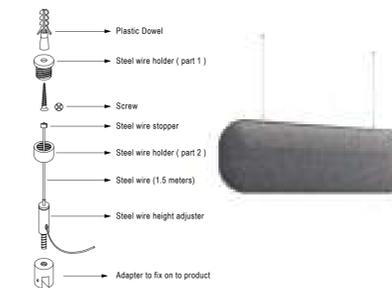

Module with metal carrier & hanging wires

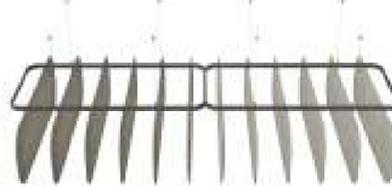

MATERIAL

Mechanical needed punch industrial felt.
100% PET up to 60% Recycled content & Recyclable
Smooth Surface - Impact Resistance - Flexible

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 tile: 1050 gr. +/- 10% tolerance
1 tile: 2.31 lbs with +/- 10% tolerance

THICKNESS



Max. 20mm (+/- 2mm) - 0.78" (+/-0.08")
Min. 5mm (+/- 2mm) - 0.19" (+/-0.08")

BOX SIZE & CONTENT

W: 1220 mm D: 1220 mm H: 120 mm
W: 48.03" D: 48.03" H: 4.72"

1 Box: 12 x panels

1 Box: 5.53 m²

1 Box: 59.52 ft²

1 Color of choice per package

Gross weight: 15 kg

Gross weight: 33.07 lbs

PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 1400 mm
W: 48" D: 40" H: 55"

8 Pcs. Box

Gross Weight

140 kg

308 lbs




W: 1200 mm D: 800 mm H: 1400 mm
W: 47.25" D: 31.5" H: 55"

7 Pcs. Box


Gross Weight

120 kg

264 lbs



ACOUSTIC PERFORMANCE

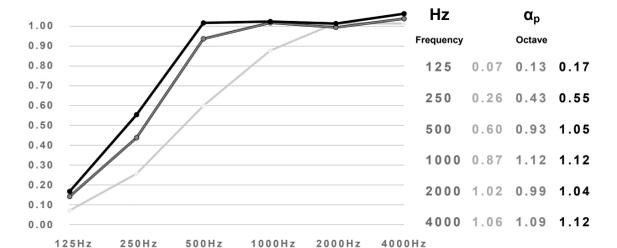

	α_w According to ISO 11654	NRC According to ASTM C423	SAA Sound Absorption Average	Class
Blade Large	0.55	0.70	0.69	D
On the surface	0.70	0.90	0.88	C
Distance to surface: 50mm	0.85	1.00	0.94	B
Distance to surface: 100mm				

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654
www.acoustera.com


Blade X Large

Sound-Absorbing Decorative Ceiling Pendant & Wall Panel

300mm x 1800mm x 20mm





WALL

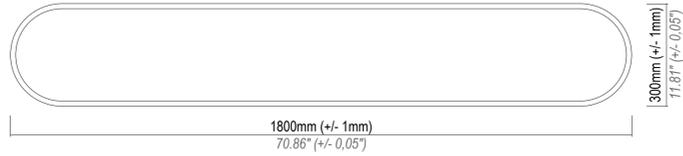

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Hook & Loop (Optional)
BXW-30AAN - Inherent (Panel Only)	12 / 6.48 m ²			
BXW-30HLN - Inherent + Hook & Loop	12 / 6.48 m ²			
BXW-30AAC - Color-IT (Panel Only)	12 / 6.48 m ²			
BXW-30HLC - Color-IT + Hook & Loop	12 / 6.48 m ²			

CEILING

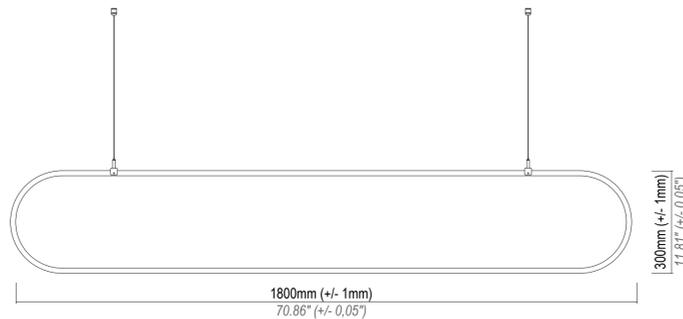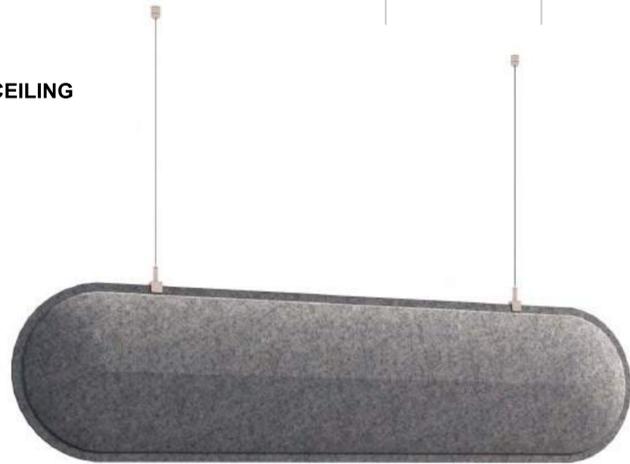

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Hanging Set
BXH-30HSN - Inherent + Hanging Set	12 / 6.48 m ²			
BXH-30HSC - Color-IT + Hanging Set	12 / 6.48 m ²			

Blade X Large



Sound-Absorbing Decorative Ceiling Module




CEILING MODULE

1 Set:

- 16 X Blade Medium
- 8 X Hanging Set
- 2 X Metal Carrier (600mm x 1200mm)
- 4 X Metal Carrier Connector
- 32 X Metal Adapter

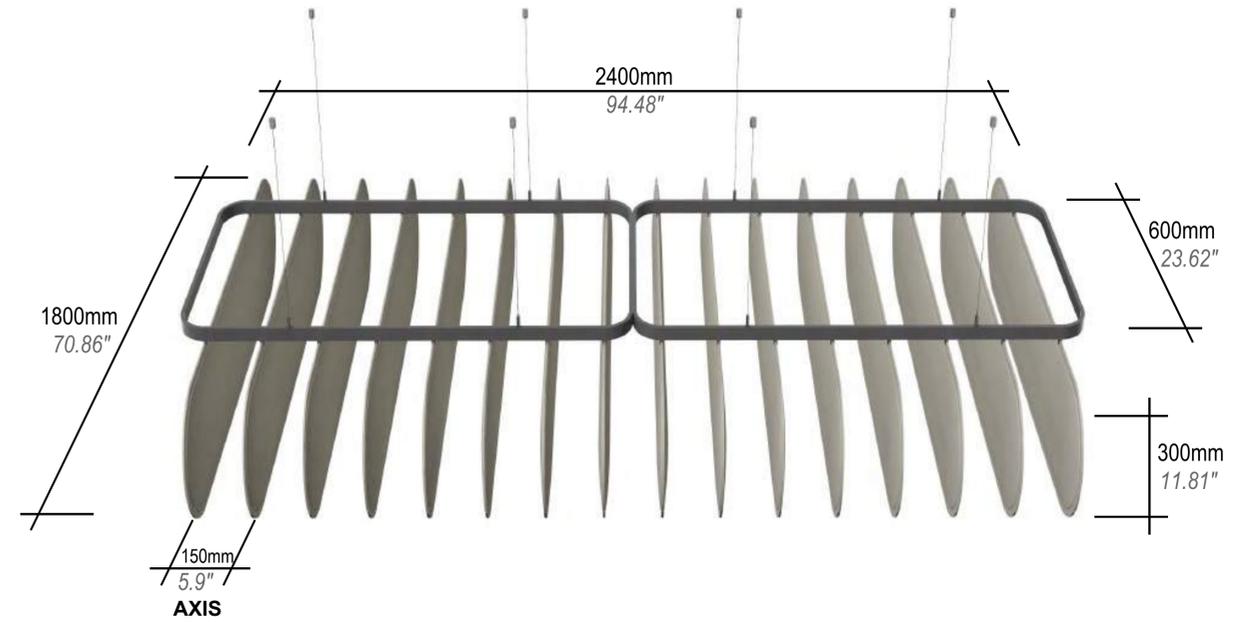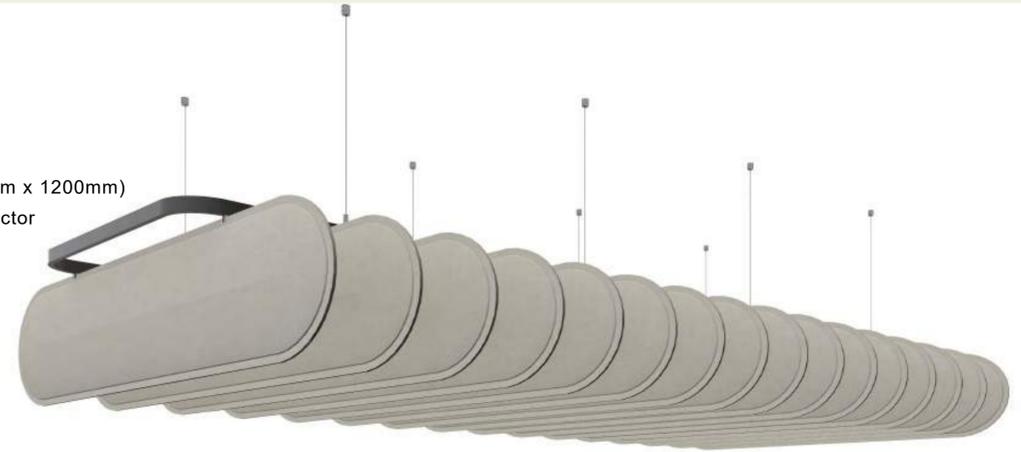

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Carrier System & Hangers
BXM-30CSN - Inherent + Carrier Set	1 Set / 4.32 m ²			
BXM-30CSC - Color-IT + Carrier Set	1 Set / 4.32 m ²			



Sound Clouds



Sound Clouds



Rotund Small, Medium & Large - ColeoLarge

Up Silence in the Clouds

'Rotund' Sound Clouds deliver Class-A acoustic performance for superior noise reduction.

These versatile "clouds" are ideal for both ceiling and wall applications, enhancing sound quality while adding modern aesthetic appeal.

'Rotund' Sound Clouds are ideal to create focal points, add visual interest, and provide targeted acoustic treatment.



Rotund Small Sound-Absorbing Decorative Wall Panel



Ø: 600mm x Thickness: 30mm

WALL



Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Mounting Brackets
RSW-30AAN - Inherent (Panel Only)	4 / 1.132 m ²			
RSW-30MBN - Inherent + Mounting Brackets	4 / 1.132 m ²			
RSW-30AAC - Color-IT (Panel Only)	4 / 1.132 m ²			
RSW-30MBC - Color-IT + Mounting Brackets	4 / 1.132 m ²			

APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needed punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK

WEIGHT
1 unit: 700 gr. +/- 10% tolerance
1 unit: 1.54 lbs with +/- 10% tolerance

THICKNESS

 Max. 30mm (+/- 2mm) - 1.18" (+/- 0.08")
 Min. 8mm (+/- 2mm) - 0.31" (+/- 0.08")
 Smooth Surface - Impact Resistance - Flexible

BOX SIZE & CONTENT
 W: 620 mm D: 660 mm H: 150 mm
 W: 24.5" D: 26" H: 5.9"
1 Box: 4 x panels
 1 Box: 1.132 m²
 1 Box: 12.185 ft²
1 Color of choice per package
 Gross weight: 4.5 kg
 Gross weight: 10.00 lbs

PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 2150 mm
 W: 48" D: 40" H: 84.5"
42 Pcs. Box
Gross Weight
 210 kg
 463 lbs

W: 1200 mm D: 800 mm H: 2150 mm
 W: 47.25" D: 31.5" H: 84.5"
30 Pcs. Box
Gross Weight
 150 kg
 330 lbs

ACOUSTIC PERFORMANCE



Rotund Small	α _w	NRC	SAA	Class
Reference Product: Rotund Large	According to ISO 11654	According to ASTM C423	Sound Absorption Average	Sound Absorption
Distance to surface: 50mm	0.95	1.00	1.00	A
Distance to surface: 100mm	1.00	1.00	1.00	A

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Rotund Small Sound-Absorbing Decorative Ceiling Pendant




Ø: 600mm x Thickness: 30mm

SOUND CLOUD



Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Hng. Wires + Unifier Ring
RSH-30HSN - Inherent + Hanging Set	4 / 1.132 m ²			<ul style="list-style-type: none"> → Plastic Dowel → Steel wire holder (part 1) → Screw → Steel wire stopper → Steel wire holder (part 2) → Steel wire (1.5 meters) → Steel wire height adjuster → Adapter fixed on the product
RSH-30HUN - Inherent + Hanging Set + Uni. Ring	4 / 1.132 m ²			
RSH-30HSC - Color-IT + Hanging Set	4 / 1.132 m ²			
RSH-30HUC - Color-IT + Hanging Set + Uni. Ring	4 / 1.132 m ²			


ACOUSTIC PERFORMANCE

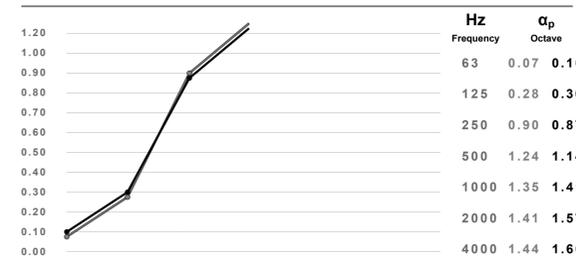

Rotund Small	α _w	NRC	SAA	Class
Reference Product: Rotund Large	According to ISO 11654	According to ASTM C423	Sound Absorption Average	Sound Absorption
Distance to surface: 250mm	1.00	1.00	1.00	A
Distance to surface: 500mm	1.00	1.00	1.00	A

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Unifier Ring

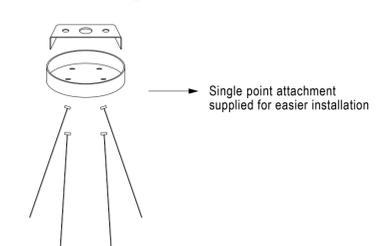

Rotund Medium Sound-Absorbing Decorative Wall Panel



Ø: 900mm x Thickness: 30mm

WALL



Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Mounting Brackets
RMW-30AAN - Inherent (Panel Only)	4 / 2.544 m ²			
RMW-30MBN - Inherent + Mounting Brackets	4 / 2.544 m ²			
RMW-30AAC - Color-IT (Panel Only)	4 / 2.544 m ²			
RMW-30MBC - Color-IT + Mounting Brackets	4 / 2.544 m ²			

APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK

WEIGHT
1 unit: 1500 gr. +/- 10% tolerance
1 unit: 3.30 lbs with +/- 10% tolerance

THICKNESS

Max. 30mm (+/- 2mm) - 1.18" (+/- 0.08")
Min. 8mm (+/- 2mm) - 0.31" (+/- 0.08")
Smooth Surface - Impact Resistance - Flexible


BOX SIZE & CONTENT
W: 1220 mm D: 1220 mm H: 150 mm
W: 48.03" D: 48.03" H: 5.90"
1 Box: 4 x panels
1 Box: 2.544 m²
1 Box: 27.383 ft²
1 Color of choice per package
Gross weight: 8 kg
Gross weight: 17.63 lbs

PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"
16 Pcs. Box
Gross Weight 150 kg
330 lbs

W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"
10 Pcs. Box
Gross Weight 100 kg
220 lbs

ACOUSTIC PERFORMANCE

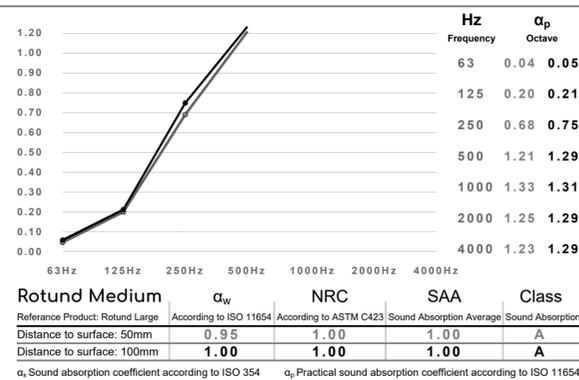

Rotund Medium Sound-Absorbing Decorative Ceiling Pendant




Ø: 900mm x Thickness: 30mm

SOUND CLOUD




Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Hng. Wires + Unifier Ring
RMH-30HSN - Inherent + Hanging Set	4 / 2.544 m ²			<ul style="list-style-type: none"> → Plastic Dowel → Steel wire holder (part 1) → Screw → Steel wire stopper → Steel wire holder (part 2) → Steel wire (1.5 meters) → Steel wire height adjuster → Adapter fixed on the product
RMH-30HUN - Inherent + Hanging Set + Uni. Ring	4 / 2.544 m ²			
RMH-30HSC - Color-IT + Hanging Set	4 / 2.544 m ²			
RMH-30HUC - Color-IT + Hanging Set + Uni. Ring	4 / 2.544 m ²			

ACOUSTIC PERFORMANCE

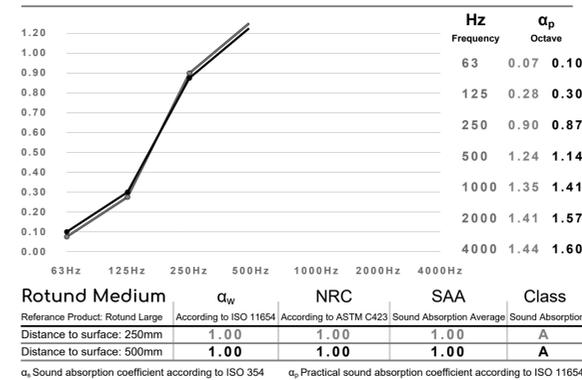

Unifier Ring

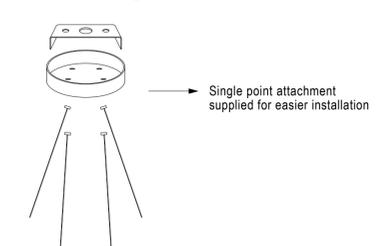

Rotund Large Sound-Absorbing Decorative Wall Panel



Ø: 1200mm x Thickness: 45mm

WALL



Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Mounting Brackets
RLW-30AAN - Inherent (Panel Only)	2 / 2.26 m ²			
RLW-30MBN - Inherent + Mounting Brackets	2 / 2.26 m ²			
RLW-30AAC - Color-IT (Panel Only)	2 / 2.26 m ²			
RLW-30MBC - Color-IT + Mounting Brackets	2 / 2.26 m ²			

APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needed punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK

WEIGHT
1 unit: 4000 gr. +/- 10% tolerance
1 unit: 8.81 lbs with +/- 10% tolerance


THICKNESS

 Max. 45mm (+/- 2mm) - 1.77" (+/-0.08")
 Min. 8mm (+/- 2mm) - 0.31" (+/-0.08")
 Smooth Surface - Impact Resistance - Flexible


BOX SIZE & CONTENT
 W: 1220 mm D: 1220 mm H: 120 mm
 W: 48.03" D: 48.03" H: 4.72"
1 Box: 2 x panels
 1 Box: 2.26 m²
 1 Box: 24.32 ft²
1 Color of choice per package
 Gross weight: 10 kg
 Gross weight: 22.04 lbs

PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 1400 mm
 W: 48" D: 40" H: 55"
8 Pcs. Box
Gross Weight 100 kg
 220 lbs



W: 1200 mm D: 800 mm H: 1400 mm
 W: 47.25" D: 31.5" H: 55"
7 Pcs. Box
Gross Weight 86 kg
 190 lbs



ACOUSTIC PERFORMANCE

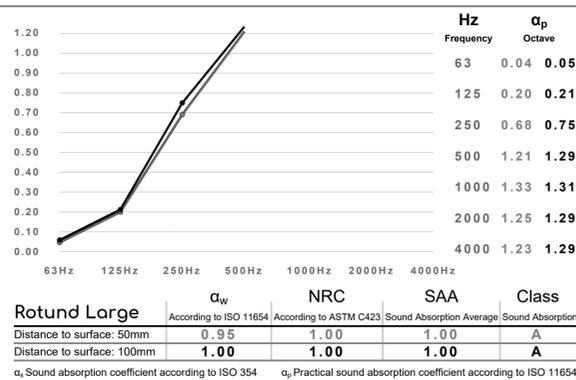

Rotund Large Sound-Absorbing Decorative Ceiling Pendant




Ø: 1200mm x Thickness: 45mm

SOUND CLOUD




Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Hng. Wires + Unifier Ring
RLH-30HSN - Inherent + Hanging Set	2 / 2.26 m ²			
RLH-30HUN - Inherent + Hanging Set + Uni. Ring	2 / 2.26 m ²			
RLH-30HSC - Color-IT + Hanging Set	2 / 2.26 m ²			
RLH-30HUC - Color-IT + Hanging Set + Uni. Ring	2 / 2.26 m ²			

ACOUSTIC PERFORMANCE

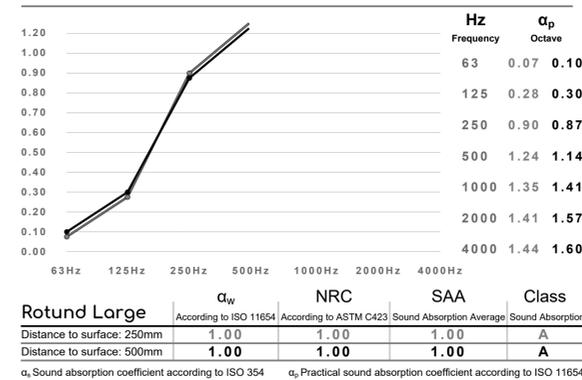

Unifier Ring

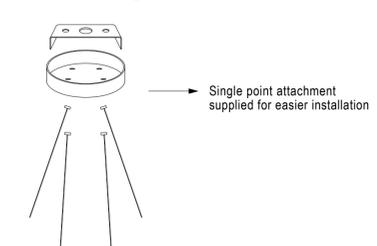


Coleo Large

Sound-Absorbing Decorative Ceiling Pendant , WallPanel & Divider



1200mm x 1800mm Thickness: 45mm

WALL

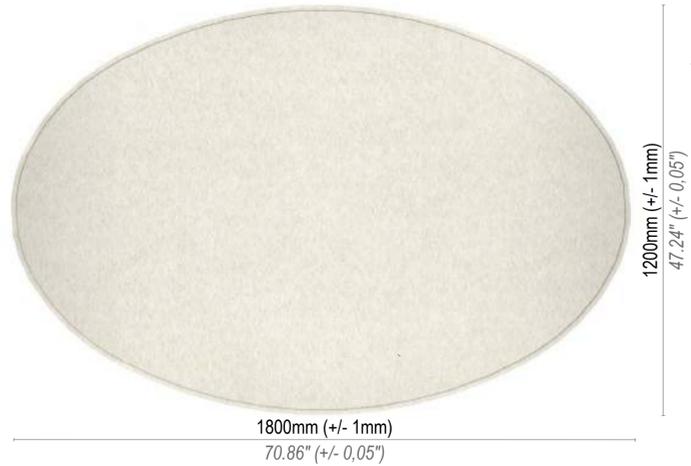

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Mounting Brackets
CLW-30AAN - Inherent (Panel Only)	2 / 3.382 m ²			
CLW-30MBN - Inherent + Mounting Brackets	2 / 3.382 m ²			
CLW-30AAC - Color-IT (Panel Only)	2 / 3.382 m ²			
CLW-30MBC - Color-IT + Mounting Brackets	2 / 3.382 m ²			

APPLICATION

Wall & Ceiling - Indoor use only

MATERIAL

Mechanical needed punch industrial felt.

100% PET up to 60% Recycled content & Recyclable

FIRE RATING

A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION

0,035 W/mK

WEIGHT

1 unit: 4500 gr. +/- 10% tolerance

1 unit: 9.92 lbs with +/- 10% tolerance

THICKNESS

Min. Max.

Max. 45mm (+/- 2mm) - 1.77" (+/- 0.08")

Min. 8mm (+/- 2mm) - 0.31" (+/- 0.08")

Smooth Surface - Impact Resistance - Flexible

BOX SIZE & CONTENT

W: 1220 mm D: 1220 mm H: 120 mm

W: 48.03" D: 48.03" H: 4.72"

1 Box: 2 x panels

1 Box: 2.842 m²

1 Box: 30.591 ft²

1 Color of choice per package

Gross weight: 12 kg


Gross weight: 26.45 lbs

PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 1400 mm
W: 48" D: 40" H: 55"
8 Pcs. Box
Gross Weight
110 kg
242 lbs

W: 1200 mm D: 800 mm H: 1400 mm
W: 47.25" D: 31.5" H: 55"
7 Pcs. Box
Gross Weight
95 kg
210 lbs

ACOUSTIC PERFORMANCE

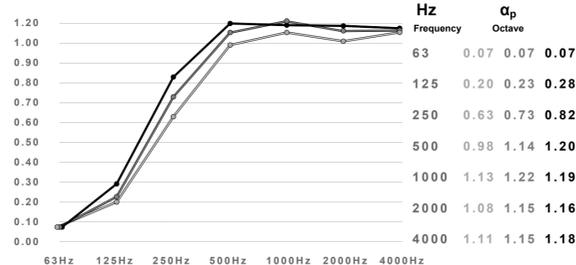

	α_w	NRC	SAA	Class
Rotund Large	0.90	1.00	0.96	A
On the surface	0.90	1.00	0.96	A
Distance to surface: 50mm	1.00	1.00	1.00	A
Distance to surface: 100mm	1.00	1.00	1.00	A

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Coleo Large

Sound-Absorbing Decorative Ceiling Pendant , WallPanel & Divider




1200mm x 1800mm Thickness: 45mm

SOUND CLOUD



Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Hng. Wires + Unifier Ring
CLH-30HSN - Inherent + Hanging Set	2 / 3.382 m ²			
CLH-30HUN - Inherent + Hanging Set + Uni. Ring	2 / 3.382 m ²			
CLH-30HSC - Color-IT + Hanging Set	2 / 3.382 m ²			
CLH-30HUC - Color-IT + Hanging Set + Uni. Ring	2 / 3.382 m ²			


ACOUSTIC PERFORMANCE

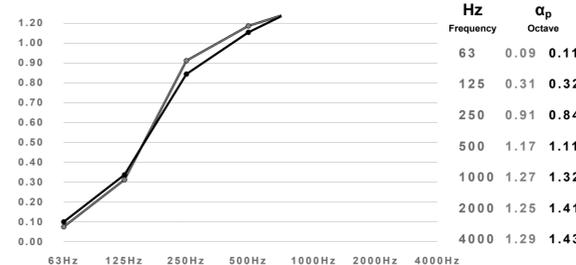


	α_w	NRC	SAA	Class
Rotund Large	1.00	1.00	1.00	A
Distance to surface: 250mm	1.00	1.00	1.00	A
Distance to surface: 500mm	1.00	1.00	1.00	A

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Unifier Ring



Single point attachment supplied for easier installation

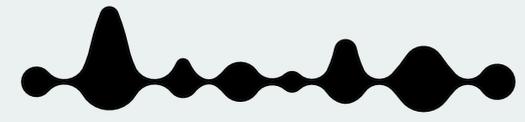

Sound Clouds



Sound Clouds

Oblong Small, Frame Large & Oblong Large

Linear Clouds for Large Spaces

'Oblong' and 'Frame' rectangular sound clouds are perfect for efficiently covering large ceiling and wall spaces, maintaining a linear design aesthetic, and maximizing space utilization.

While ideal for modern settings with straight lines and angles, such as corridors, hallways, and open-plan offices, they also fit well in traditional designs.

These sound clouds offer a dynamic visual element, focused sound absorption, and Class-A acoustic performance, enhancing sound quality and comfort




Oblong Small

Sound-Absorbing Decorative Ceiling Pendant & WallPanel



600mm x 1200mm Thickness: 30mm

WALL

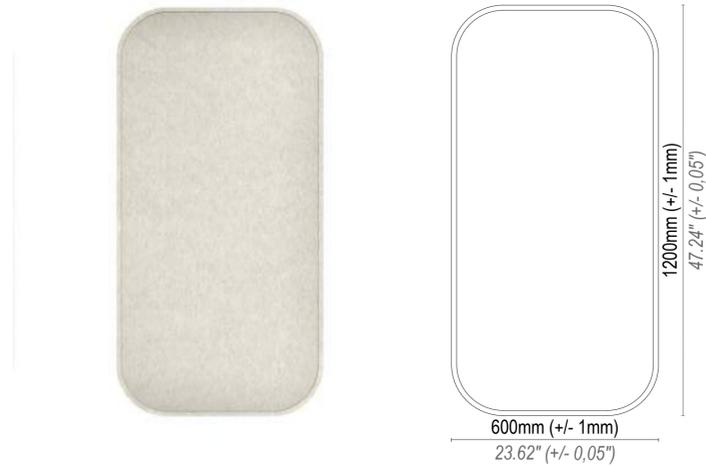

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Mounting Brackets
OSW-30AAN - Inherent (Panel Only)	4 / 2.804 m ²			
OSW-30MBN - Inherent + Mounting Brackets	4 / 2.804 m ²			
OSW-30AAC - Color-IT (Panel Only)	4 / 2.804 m ²			
OSW-30MBC - Color-IT + Mounting Brackets	4 / 2.804 m ²			

APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK

WEIGHT
1 unit: 1750 gr. +/- 10% tolerance
1 unit: 3.86 lbs with +/- 10% tolerance

THICKNESS

Max. 30mm (+/- 2mm) - 1.18" (+/-0.08")
Min. 8mm (+/- 2mm) - 0.31" (+/-0.08")
Smooth Surface - Impact Resistance - Flexible


BOX SIZE & CONTENT
W: 620 mm D: 1220 mm H: 150 mm
W: 24.5" D: 48.03" H: 5.9"
1 Box: 2 x panels
1 Box: 2.804 m²
1 Box: 30.182 ft²
1 Color of choice per package
Gross weight: 8.5 kg
Gross weight: 19.00 lbs

PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 2150 mm
W: 48" D: 40" H: 84.5"
21 Pcs. Box
Gross Weight
180 kg
397 lbs

W: 1200 mm D: 800 mm H: 2150 mm
W: 47.25" D: 31.5" H: 84.5"
15 Pcs. Box
Gross Weight
145 kg
320 lbs

ACOUSTIC PERFORMANCE

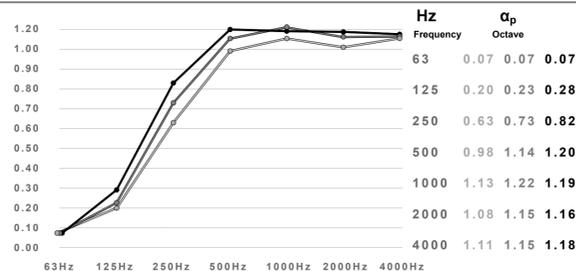

Reference Product: Oblong Large	alpha_w	NRC	SAA	Class
On the surface	0.90	1.00	0.96	A
Distance to surface: 50mm	1.00	1.00	1.00	A
Distance to surface: 100mm	1.00	1.00	1.00	A

alpha_w Sound absorption coefficient according to ISO 11654 alpha_p Practical sound absorption coefficient according to ISO 11654

Oblong Small

Sound-Absorbing Decorative Ceiling Pendant & WallPanel




600mm x 1200mm Thickness: 30mm

SOUND CLOUD



Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Hng. Wires + Unifier Ring
OSH-30HSN - Inherent + Hanging Set	4 / 2.804 m ²			<ul style="list-style-type: none"> Plastic Dowel Steel wire holder (part 1) Screw Steel wire stopper Steel wire holder (part 2) Steel wire (1.5 meters) Steel wire height adjuster Adapter fixed on the product
OSH-30HUN - Inherent + Hanging Set + Uni. Ring	4 / 2.804 m ²			
OSH-30HSC - Color-IT + Hanging Set	4 / 2.804 m ²			
OSH-30HUC - Color-IT + Hanging Set + Uni. Ring	4 / 2.804 m ²			


ACOUSTIC PERFORMANCE

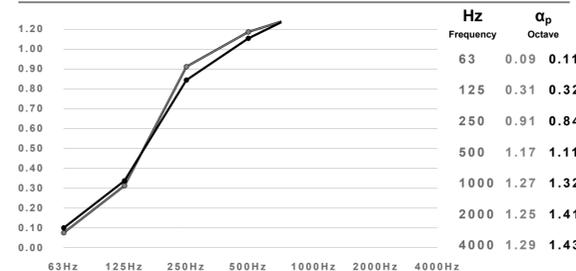

Reference Product: Oblong Large	alpha_w	NRC	SAA	Class
Distance to surface: 250mm	1.00	1.00	1.00	A
Distance to surface: 500mm	1.00	1.00	1.00	A

alpha_w Sound absorption coefficient according to ISO 11654 alpha_p Practical sound absorption coefficient according to ISO 11654

Unifier Ring

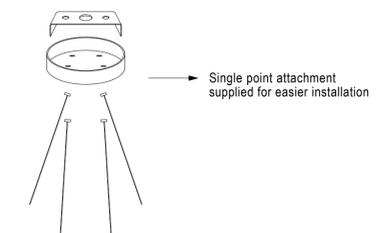

Frame Large

Sound-Absorbing Decorative Ceiling Pendant & WallPanel



1200mm x 1200mm Thickness: 45mm

WALL



Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Color-IT	Mounting Brackets
FLW-30AAN - Inherent (Panel Only)	2 / 2.842 m ²				
FLW-30MBN - Inherent + Mounting Brackets	2 / 2.842 m ²				
FLW-30AAC - Color-IT (Panel Only)	2 / 2.842 m ²				
FLW-30MBC - Color-IT + Mounting Brackets	2 / 2.842 m ²				

APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK

WEIGHT
1 unit: 4500 gr. +/- 10% tolerance
1 unit: 9.92 lbs with +/- 10% tolerance


THICKNESS

Max. 45mm (+/- 2mm) - 1.77" (+/- 0.08")
Min. 8mm (+/- 2mm) - 0.31" (+/- 0.08")
Smooth Surface - Impact Resistance - Flexible


BOX SIZE & CONTENT
W: 1220 mm D: 1220 mm H: 120 mm
W: 48.03" D: 48.03" H: 4.72"
1 Box: 2 x panels
1 Box: 2.842 m²
1 Box: 30.591 ft²
1 Color of choice per package
Gross weight: 12 kg
Gross weight: 26.45 lbs

PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 1400 mm
W: 48" D: 40" H: 55"
8 Pcs. Box
Gross Weight
110 kg
242 lbs



W: 1200 mm D: 800 mm H: 1400 mm
W: 47.25" D: 31.5" H: 55"
7 Pcs. Box
Gross Weight
95 kg
210 lbs



ACOUSTIC PERFORMANCE

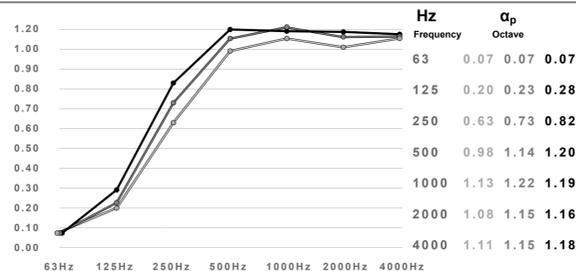

	α _w	NRC	SAA	Class
Rotund Large	0.90	1.00	0.96	A
On the surface	1.00	1.00	1.00	A
Distance to surface: 50mm	1.00	1.00	1.00	A
Distance to surface: 100mm	1.00	1.00	1.00	A

α_w Sound absorption coefficient according to ISO 11654 α_p Practical sound absorption coefficient according to ISO 11654

Frame Large

Sound-Absorbing Decorative Ceiling Pendant & WallPanel




1200mm x 1200mm Thickness: 45mm

SOUND CLOUD



Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Hng. Wires + Unifier Ring
FLH-30HSN - Inherent + Hanging Set	2 / 2.842 m ²			<ul style="list-style-type: none"> Plastic Dowel Steel wire holder (part 1) Screw Steel wire stopper Steel wire holder (part 2) Steel wire (1.5 meters) Steel wire height adjuster Adapter fixed on the product
FLH-30HUN - Inherent + Hanging Set + Uni. Ring	2 / 2.842 m ²			
FLH-30HSC - Color-IT + Hanging Set	2 / 2.842 m ²			
FLH-30HUC - Color-IT + Hanging Set + Uni. Ring	2 / 2.842 m ²			


ACOUSTIC PERFORMANCE

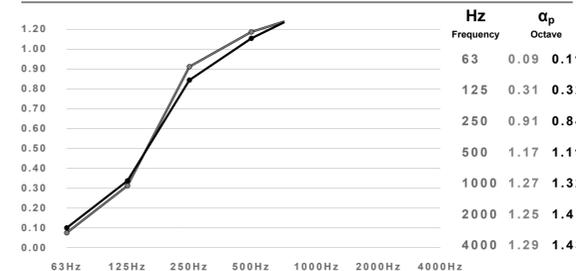

	α _w	NRC	SAA	Class
Rotund Large	1.00	1.00	1.00	A
Distance to surface: 250mm	1.00	1.00	1.00	A
Distance to surface: 500mm	1.00	1.00	1.00	A

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Unifier Ring

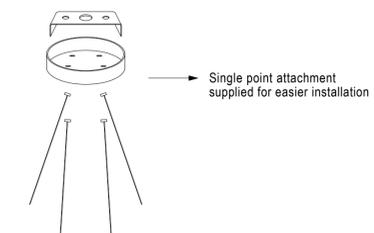


Oblong Large

Sound-Absorbing Decorative Ceiling Pendant & WallPanel



1200mm x 1800mm Thickness: 45mm

WALL

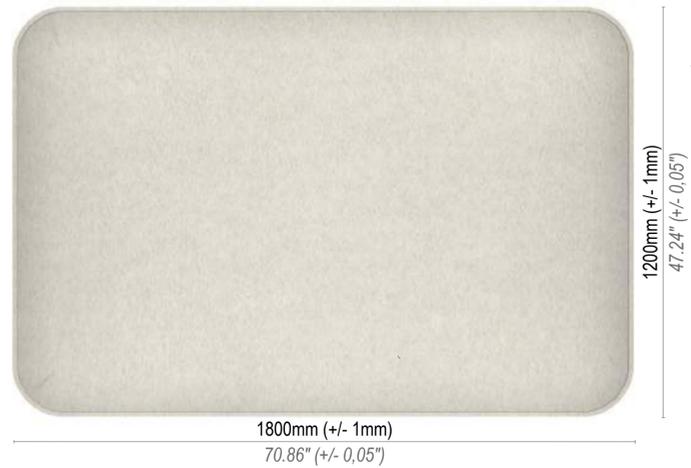

Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Mounting Brackets
OLW-30AAN - Inherent (Panel Only)	2 / 4.280 m ²			
OLW-30MBN - Inherent + Mounting Brackets	2 / 4.280 m ²			
OLW-30AAC - Color-IT (Panel Only)	2 / 4.280 m ²			
OLW-30MBC - Color-IT + Mounting Brackets	2 / 4.280 m ²			

APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK



WEIGHT
1 unit: 6750 gr. +/- 10% tolerance
1 unit: 14.90 lbs with +/- 10% tolerance

THICKNESS


Max. 45mm (+/- 2mm) - 1.77\"/>

BOX SIZE & CONTENT
W: 1220 mm D: 1820 mm H: 120 mm
W: 48.03\"/>

PALETTE SIZE & CONTENT



ACOUSTIC PERFORMANCE

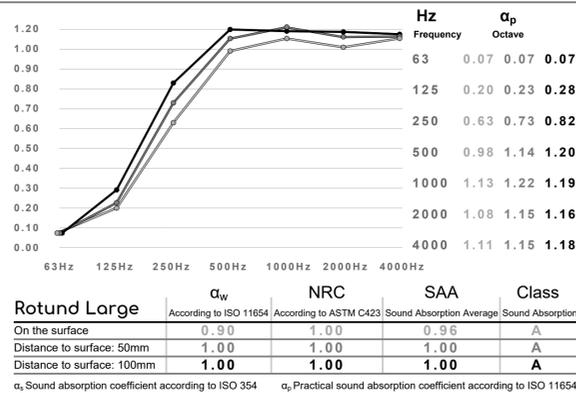

Oblong Large

Sound-Absorbing Decorative Ceiling Pendant & WallPanel




1200mm x 1800mm Thickness: 45mm

SOUND CLOUD





Product Code / Description	Box Qty / m ²	Inherent	Color-IT	Color-IT	Hng. Wires + Unifier Ring
OLH-30HSN - Inherent + Hanging Set	2 / 4.280 m ²				
OLH-30HUN - Inherent + Hanging Set + Uni. Ring	2 / 4.280 m ²				
OLH-30HSC - Color-IT + Hanging Set	2 / 4.280 m ²				
OLH-30HUC - Color-IT + Hanging Set + Uni. Ring	2 / 4.280 m ²				

ACOUSTIC PERFORMANCE

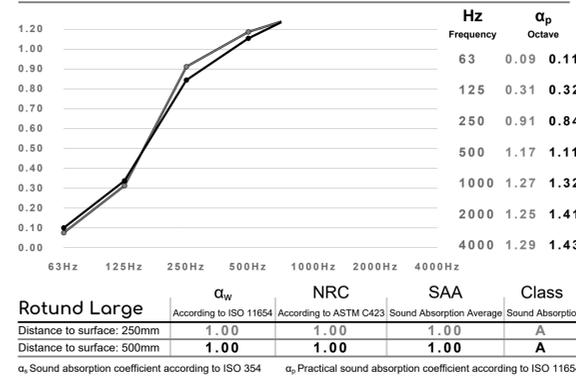

Unifier Ring

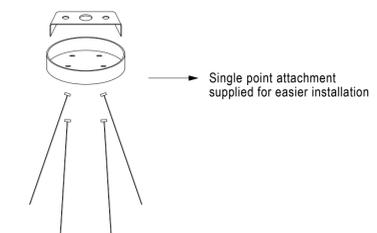



Dividers on Legs & Casters



Dividers



Privacy in Quieter spaces

You can transform your spatial planning with our high-performance sound-absorbing room dividers.

These innovative solutions not only enhance acoustic comfort but also facilitate the creation of personal areas, allowing you to design private spaces tailored to your needs.

Experience a new level of functionality and tranquility in your environment.

Oblong Large
On Casters

w:1200mm h:1800mm



Oblong Large
On Legs

w:1200mm h:1800mm



Frame Large
On Casters

w:1200mm h:1200mm

Frame Large
On Legs

w:1200mm h:1200mm

Rotund Large
On Legs

R:1200mm



Coleo

On Legs

w:1200mm h:1800mm



Rotund L - Divider Sound-Absorbing Decorative Divider



Ø:1200mm x Thickness: 45mm H: 1300mm Base Ø: 400mm

DIVIDER



APPLICATION
Divider - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK

WEIGHT
1 unit: 9000 gr. +/- 10% tolerance
1 unit: 19.84 lbs with +/- 10% tolerance

THICKNESS

Max. 45mm (+/- 2mm) - 1.77" (+/-0.08")
Min. 8mm (+/- 2mm) - 0.31" (+/-0.08")

Smooth Surface - Impact Resistance - Flexible


BOX SIZE & CONTENT
W: 1220 mm D: 1220 mm H: 120 mm
W: 48.03" D: 48.03" H: 4.72"

1 Box: 2 x panels


1 Color of choice per package
Gross weight: 20 kg
Gross weight: 44 lbs

PALETTE SIZE & CONTENT


W: 1220 mm D: 1015 mm H: 1400 mm
W: 48" D: 40" H: 55"
8 Pcs. Box
Gross Weight 180 kg
396 lbs



W: 1200 mm D: 800 mm H: 1400 mm
W: 47.25" D: 31.5" H: 55"
7 Pcs. Box
Gross Weight 160 kg
353 lbs



ACOUSTIC PERFORMANCE

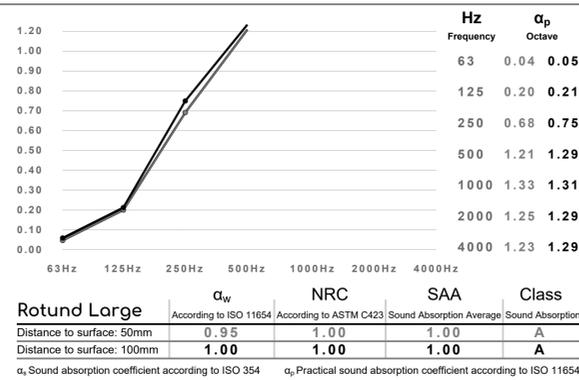


Rotund L - Divider Sound-Absorbing Decorative Divider



Ø:1200mm x Thickness: 45mm H: 1300mm Base Ø: 400mm

DIVIDER

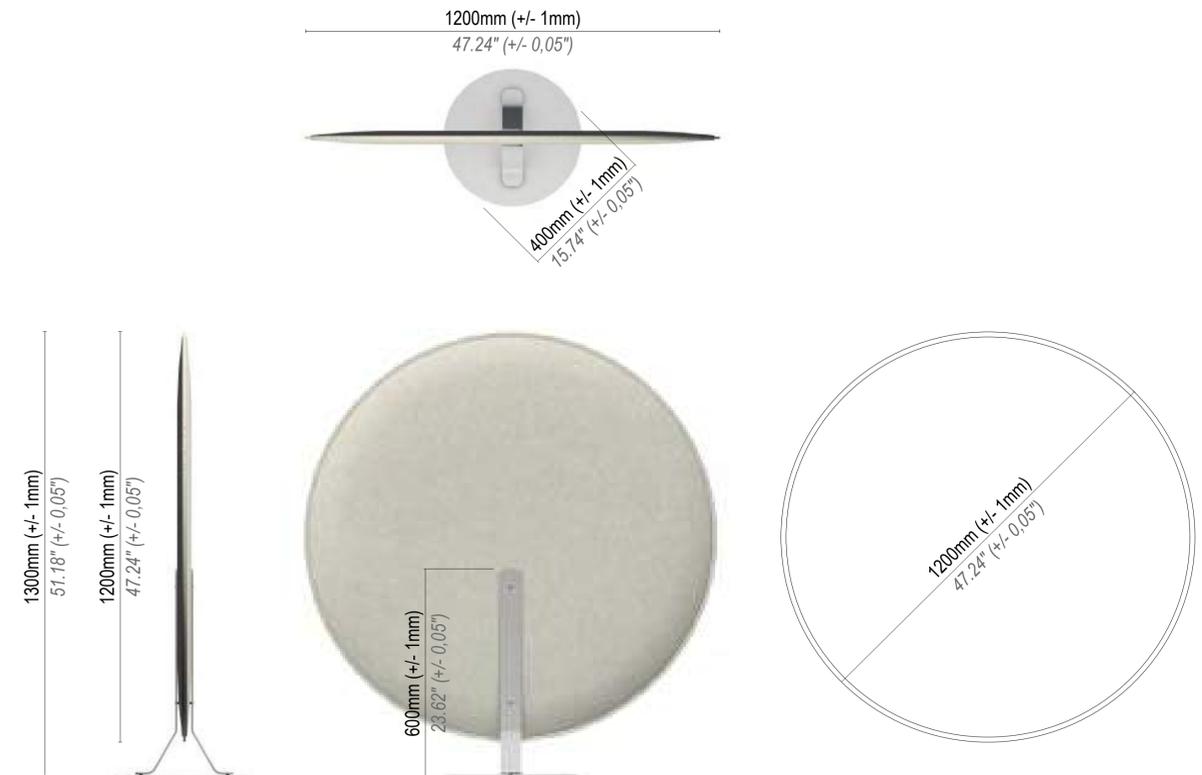

Product Code / Description	Box Qty	Inherent	Color-IT
RLD-30BFN - Inherent	2		
RLD-30BFC - Color-IT	2		

Coleo L - Divider

Sound-Absorbing Decorative Divider

1200mm x 1800mm Thickness: 45mm H: 1900mm Base Ø: 400mm



DIVIDER



APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK

WEIGHT
1 unit: 12.000 gr. +/- 10% tolerance
1 unit: 26.45 lbs with +/- 10% tolerance

THICKNESS

Max. 45mm (+/- 2mm) - 1.77" (+/- 0.08")
Min. 8mm (+/- 2mm) - 0.31" (+/- 0.08")
Smooth Surface - Impact Resistance - Flexible

BOX SIZE & CONTENT
W: 1220 mm D: 1820 mm H: 120 mm
W: 48.03" D: 71.65" H: 4.72"


1 Box: 2 x panels

1 Color of choice per package
Gross weight: 27 kg
Gross weight: 59.52 lbs

PALETTE SIZE & CONTENT

W: 1220 mm D: 1015 mm H: 2000 mm
W: 48" D: 40" H: 79"


8 Pcs. Box
Gross Weight
240 kg
530 lbs



W: 1200 mm D: 800 mm H: 2000 mm
W: 47.25" D: 31.5" H: 79"

7 Pcs. Box
Gross Weight
205 kg
452 lbs

ACOUSTIC PERFORMANCE

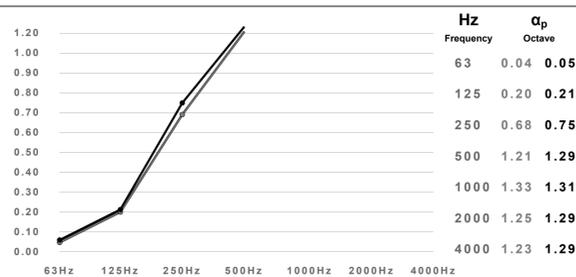

	α_w	NRC	SAA	Class
Rotund Large	0.95	1.00	1.00	A
Distance to surface: 50mm	0.95	1.00	1.00	A
Distance to surface: 100mm	1.00	1.00	1.00	A

α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654




Coleo L - Divider

Sound-Absorbing Decorative Divider

Ø:1200mm x Thickness: 45mm H: 1300mm Base Ø: 400mm



DIVIDER

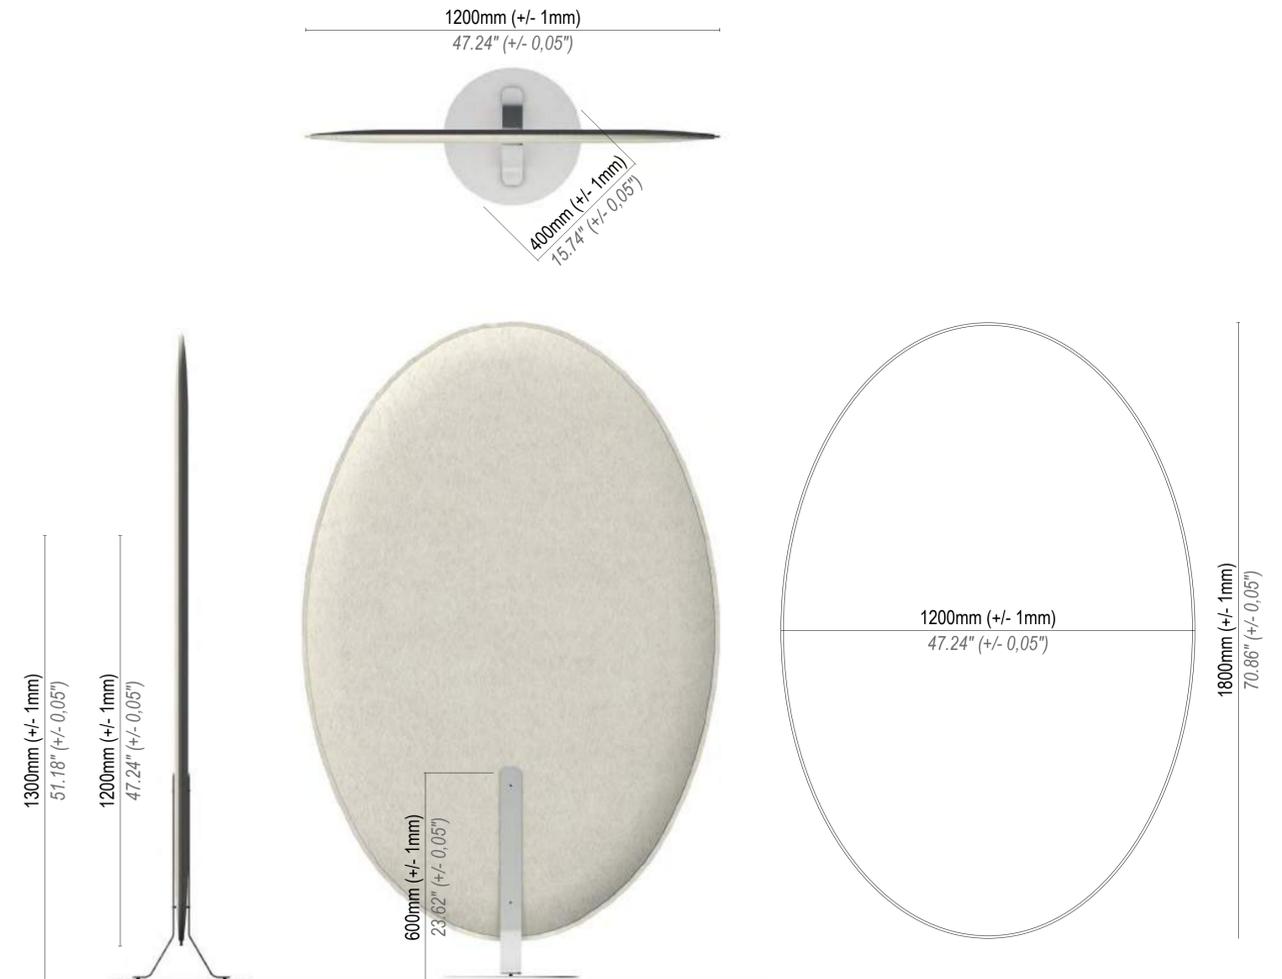

Product Code / Description	Box Qty	Inherent	Color-IT
CLD-30BFC - Inherent	2		
CLD-30BFC - Color-IT	2		

Frame L - Divider Sound-Absorbing Decorative Divider

1200mm x 1200mm Thickness: 45mm H: 1300mm Base: 120 x 400mm



DIVIDER ON CASTERS



DIVIDER ON LEGS



APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK

WEIGHT
1 unit: 11.000 gr. +/- 10% tolerance
1 unit: 24.25 lbs with +/- 10% tolerance

THICKNESS


Max. 45mm (+/- 2mm) - 1.77" (+/-0.08")
Min. 8mm (+/- 2mm) - 0.31" (+/-0.08")
Smooth Surface - Impact Resistance - Flexible

BOX SIZE & CONTENT
W: 1220 mm D: 1220 mm H: 120 mm
W: 48.03" D: 48.03" H: 4.72"

1 Box: 2 x panels
1 Color of choice per package
Gross weight: 25 kg
Gross weight: 55.11 lbs


W: 1220 mm D: 1015 mm H: 1400 mm
W: 48" D: 40" H: 55"

8 Pcs. Box
Gross Weight
220 kg
485 lbs




W: 1200 mm D: 800 mm H: 1400 mm
W: 47.25" D: 31.5" H: 55"

7 Pcs. Box
Gross Weight
190 kg
420 lbs



ACOUSTIC PERFORMANCE

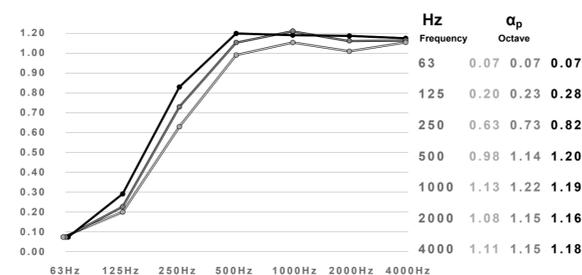

	α_w	NRC	SAA	Class
Rotund Large	0.90	1.00	0.96	A
On the surface	1.00	1.00	1.00	A
Distance to surface: 50mm	1.00	1.00	1.00	A
Distance to surface: 100mm	1.00	1.00	1.00	A


α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Frame L - Divider Sound-Absorbing Decorative Divider

1200mm x 1200mm Thickness: 45mm H: 1300mm Base: 120 x 400mm



DIVIDER

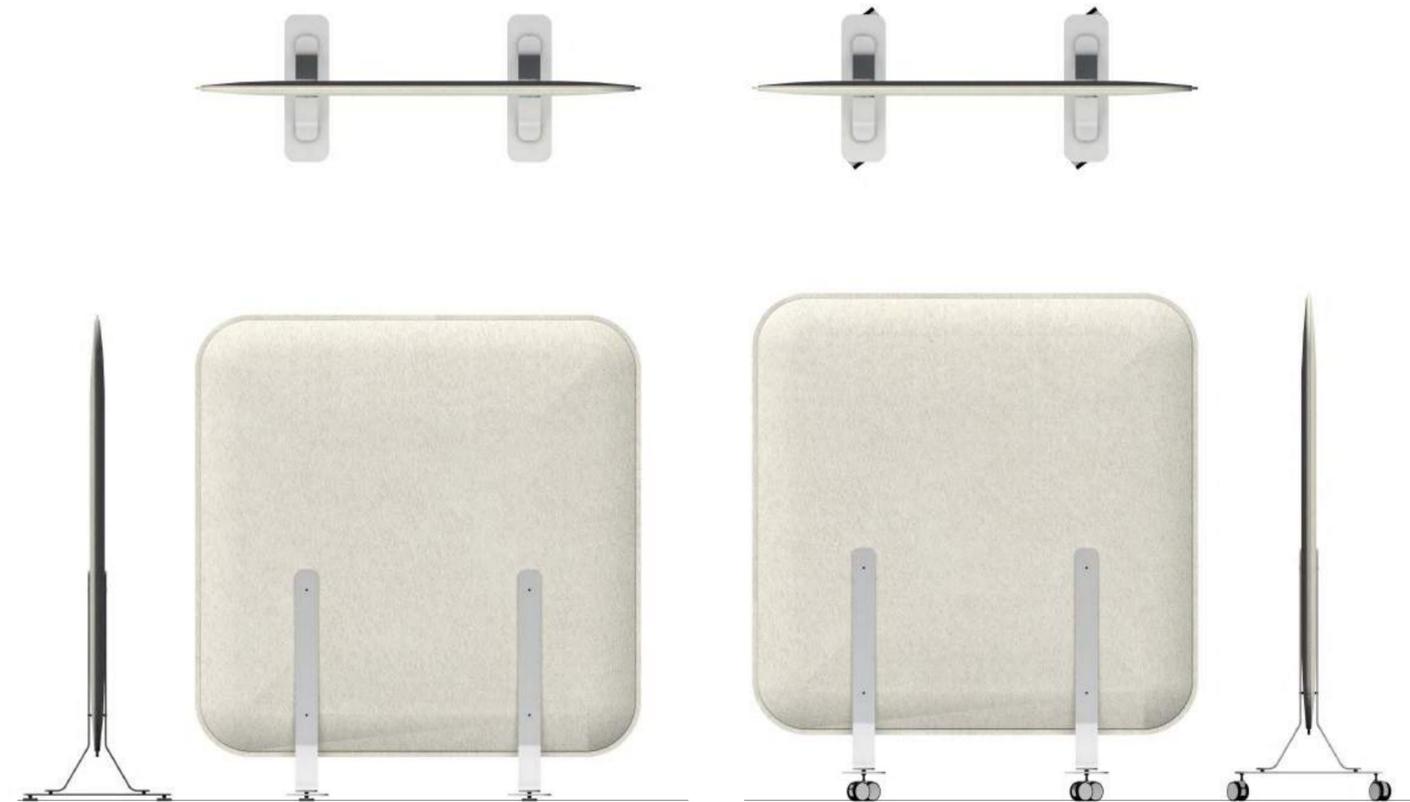

Product Code / Description	Box Qty	Inherent	Color-IT
FLD-30BPN - Inherent	2		
FLD-30BCN - Inherent + Casters	2		
FLD-30BPC - Color-IT	2		
FLD-30BCC - Color-IT + Casters	2		



Oblong L - Divider Sound-Absorbing Decorative Divider

1200mm x 1800mm Thickness: 45mm H: 1900mm Base: 120 x 400mm



DIVIDER ON CASTERS

DIVIDER ON LEGS

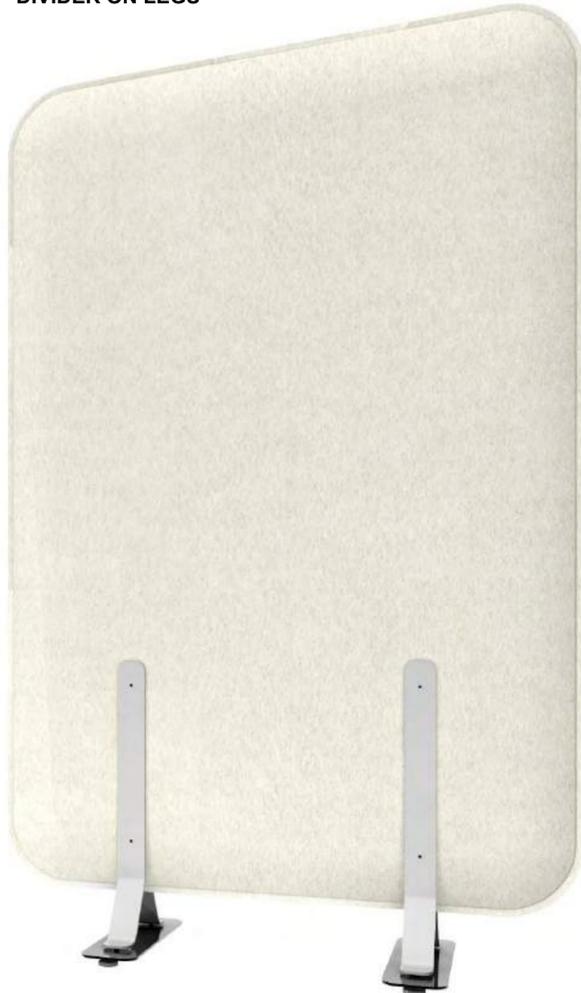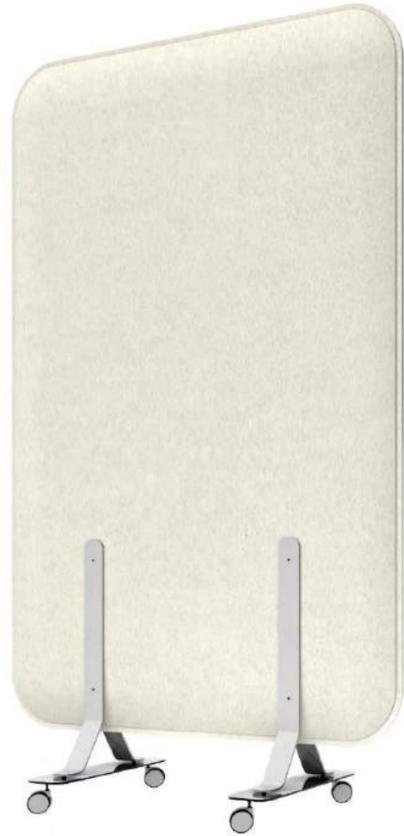

APPLICATION
Wall & Ceiling - Indoor use only

MATERIAL
Mechanical needled punch industrial felt.
100% PET up to 60% Recycled content & Recyclable

FIRE RATING
A Class (ASTM E84) - B s1 d0 (EN 13501-1)

THERMAL INSULATION
0,035 W/mK


WEIGHT
1 unit: 4500 gr. +/- 10% tolerance
1 unit: 9.92 lbs with +/- 10% tolerance

THICKNESS


Max. 45mm (+/- 2mm) - 1.77" (+/-0.08")
Min. 8mm (+/- 2mm) - 0.31" (+/-0.08")
Smooth Surface - Impact Resistance - Flexible

BOX SIZE & CONTENT
W: 1220 mm D: 1220 mm H: 120 mm
W: 48.03" D: 48.03" H: 4.72"
1 Box: 2 x panels
1 Box: 2.842 m²
1 Box: 30.591 ft²
1 Color of choice per package
Gross weight: 12 kg
Gross weight: 26.45 lbs


W: 1220 mm D: 1015 mm H: 1400 mm
W: 48" D: 40" H: 55"
8 Pcs. Box
Gross Weight
110 kg
242 lbs



W: 1200 mm D: 800 mm H: 1400 mm
W: 47.25" D: 31.5" H: 55"
7 Pcs. Box
Gross Weight
95 kg
210 lbs



ACOUSTIC PERFORMANCE

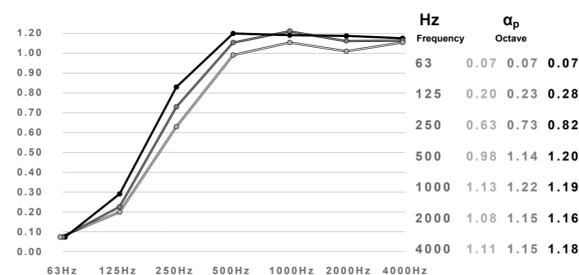

	α _w	NRC	SAA	Class
Rotund Large				
On the surface	0.90	1.00	0.96	A
Distance to surface: 50mm	1.00	1.00	1.00	A
Distance to surface: 100mm	1.00	1.00	1.00	A


α_w Sound absorption coefficient according to ISO 354 α_p Practical sound absorption coefficient according to ISO 11654

Oblong L - Divider Sound-Absorbing Decorative Divider


1200mm x 1800mm Thickness: 45mm H: 1900mm Base: 120 x 400mm



DIVIDER

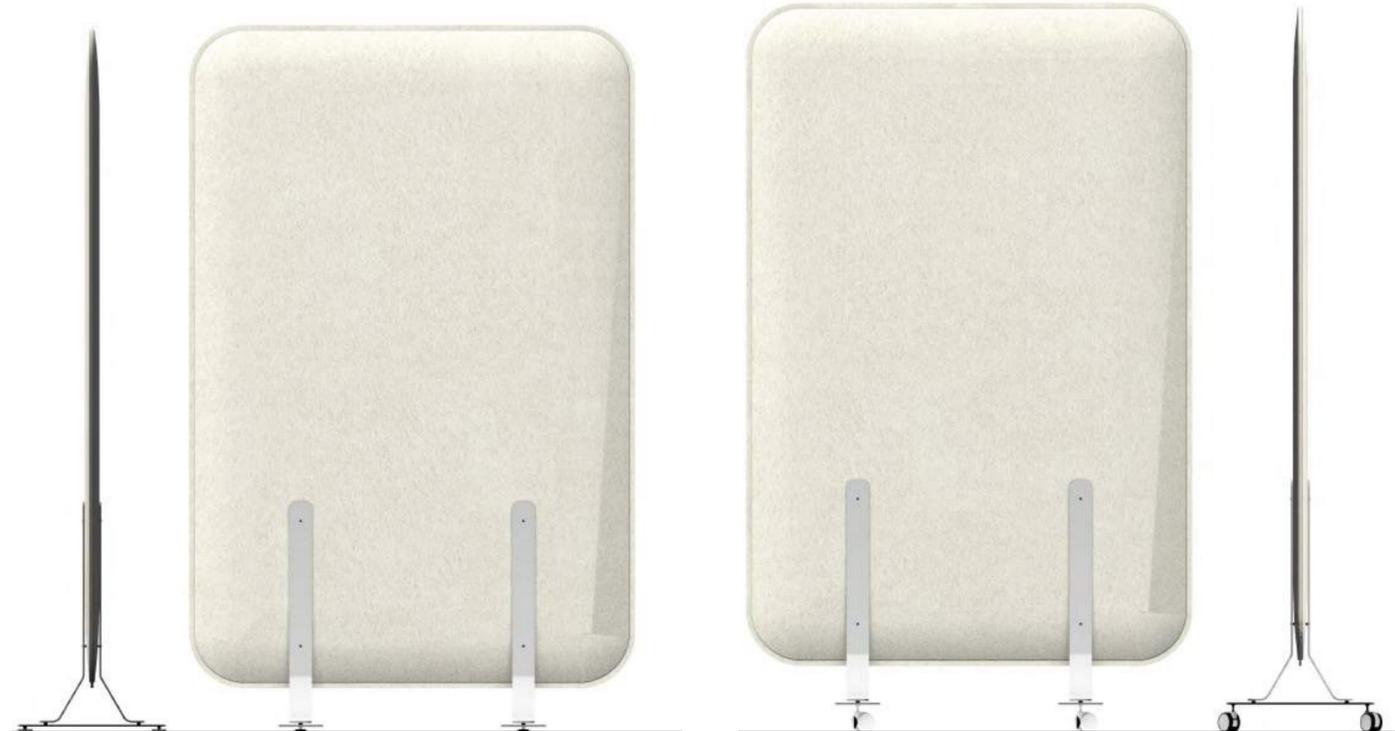

Product Code / Description	Box Qty	Inherent	Color-IT	Color-IT
OLD-30BPN - Inherent	2			
OLD-30BCN - Inherent + Casters	2			
OLD-30BPC - Color-IT	2			
OLD-30BCC - Color-IT + Casters	2			




Hanging Dividers





The colors displayed in this palette may not accurately represent their true appearance on screen.

The colors displayed in this palette may not accurately represent their true appearance on screen.

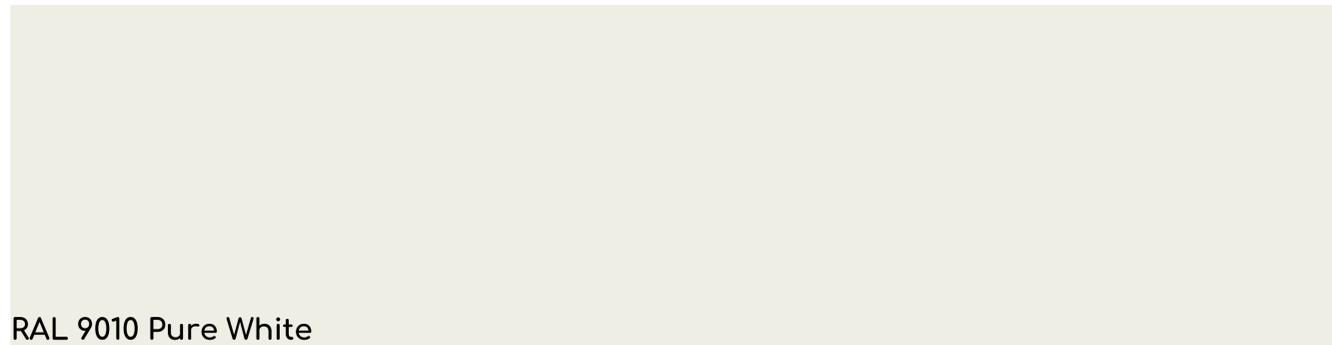

RAL 9010 Pure White



RAL 9006 White Aluminium



RAL 7043 Traffic Gray B



RAL 9005 Jet Black

RAL 9010 Pure White



RAL 9006 White Aluminium



RAL 7043 Traffic Gray B



RAL 9005 Jet Black



Turkiye Sales - Authorized dealer

bf

 **Baf Control**

Atalar Mah. Çanakkale Cad.
No: 31/4 Kartal - İstanbul / Türkiye



Phone
+90 (216) 353 5363



Email Adress
info@bafcontrol.com

World Sales


ACOUSTERA
Acoustics in Style & Eco-Care



Kültür Mah. Öz Sk. Öz İşhanı No:1D
81010 Merkez/Düzce - Türkiye



Email Adress
info@acoustera.com



Email Adress
sales@acoustera.com

Americas Sales


ACOUSTERA
Acoustics in Style & Eco-Care



16180 Aberdeen Ave Naples, FL
34110 - USA



Email Adress
sales@acoustera.com

www.acoustera.com