

DESCOR® PREMIUM Acoustic

Field of application

Acoustic

Specifications

REF.	699144 085 *699144 347 086
	100 % Trevira CS knit fabrics PVC-free, recyclable
	ca. 320/ 420/ 520cm cm ca. 122/ 165/ 205 inch other widths available on request
	B-s1, d0 DIN EN 13501-1 (only white) Class A ASTM E84-16 (only white) * M1 NF P 92 503- 507 (only black)
	ca. 195 g/m ² *ca. 195 g/m ² ca. 5.6 oz/yd ² *ca. 5.5 oz/yd ²
	rolls 50 m 55 yd
	blank: 7 DIN EN ISO 105-B02 (only white)
	ca. 0,39 mm *ca. 0,38 mm ca. 390 µm *ca. 380 µm
	cold, heat, ultrasonic cut
Specs	with micro-perforation air permeable

Printing methods

print	UV	Latex	Dyesub
Inside	•		
Outside			

Printable in 16,7 million different colours

Certifications (only white)




Acoustic absorption value α_w /class*: 0.90/ A

Type of assembly E-50 according to DIN EN ISO 354.

Textile in front of total 50 mm, included

40 mm ISOVER SSP 2 and 10 mm airspace.

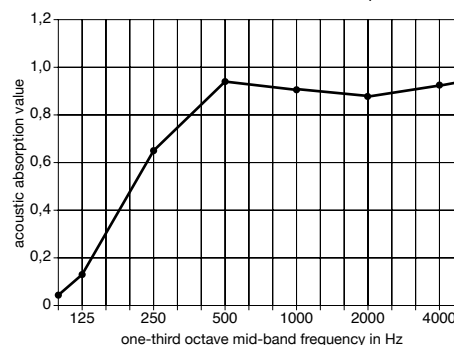

Noise Reduction Coefficient (NRC) according to ASTM C423, Type G-75: 0.45


* DESCOR® PREMIUM Acoustic black

Please note, there may be slight variations in technical details for other DESCOR® colours.

DESCOR® PREMIUM Acoustic

Field of application

Acoustic

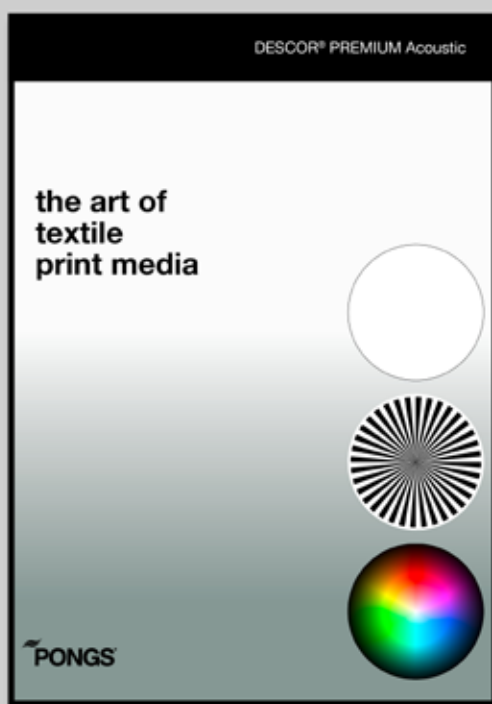

Ref.-Nr.: 699144 085 | Preview print sample