

PrintTex®

SILENCIO® Size 10

Field of application

Acoustic

Specifications

	687301 003
	100 % Trevira CS weave fabrics PVC-free, recyclable
	ca. 155/ 252/ 310/ 505 cm ca. 61/ 99 / 122/ 199 inch other widths available on request
	B-s1, d0 DIN EN 13501-1
	Class A ASTM E84-16 NFPA 701
	ca. 300 g/m ² ca. 8.8 oz/yd ²
	ca. 2.2 mm ca. 2200 µm
	rolls 25 m 27 yd
	warp: 1725.2 N weft: 1151.7 N DIN EN ISO 1421
	warp: 44.3 % weft: 18.0 % DIN EN ISO 1421
	warp: 1.0 % weft: 0.4 % DIN EN 14704-1
	cold, ultrasonic cut
	total footprint: 2,080 kg CO ₂ eq./m ² determination accuracy: 84%

Printing methods


print	UV	Latex	Dyesub
Inside	•	•	
Outside	•	•	

Certifications



Acoustic absorption value α_w : 0.85 / class: B

Type of assembly E-50 according to DIN EN ISO 354. Textile in front of total 50 mm, included 2 x 20 mm ISOVER SSP 2 and 10 mm airspace.

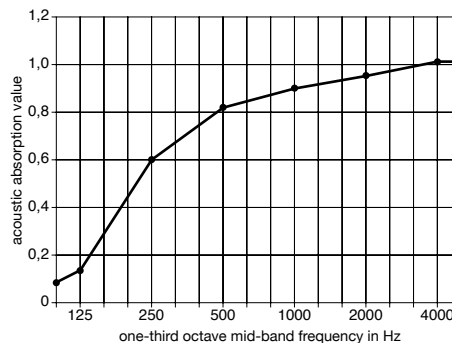

Noise Reduction Coefficient (NRC) according to ASTM C423, Type G-75: 0.35



PrintTex® SILENCIO® Size 10

Field of application

Acoustic



Ref.-Nr.: 687301 003 | Preview print sample



PONGS GROUP GMBH & CO. KG

Bahnhofstraße 21
07919 Pausa-Mühltröf
Germany

Phone +49 211 54230-840
sales@pongs.de
www.pongs.com

Find the latest version by scanning the QR code.
We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of $\pm 5\%$ is valid. Effective: 2025/02